

Vulcan Sunrise

Commercial Sheetfed/Packaging

Vulcan Sunrise




Main Application

Commercial Sheetfed/Packaging

Advantages of the product

- › Specifically designed for H-UV, LED UV printing
- › Very good ink release reducing the back-trapping
- › Excellent print quality of solids and half tones

Vulcan Sunrise is available in
3ply, 1,96 mm thickness

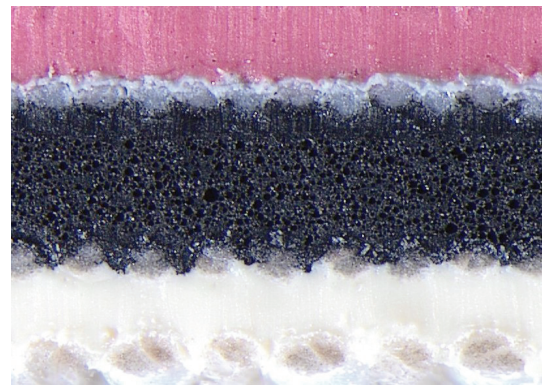

Guiding Value

Standard

| | | |
|------------------------------------|------------|-------------------------------|
| Color: | Red | |
| Structure: | 3 ply | |
| Surface Roughness Ra*: | 0,8 micron | IO LAB TEC 060 - E (internal) |
| Compressibility @ 0,23 mm*: | 2,8 MPa | IO LAB TEC 060 - B (internal) |
| Thickness +/-0,02 mm*: | 1,96 mm | IO LAB TEC 060 - C (internal) |

* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



Continental Coated Systems Italy S.p.A
Strada Provinciale 140,
26855 Lodi Vecchio, Italy
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only.
The trademarks displayed in this publication are the property of Continental AG and/or its
affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved.
For complete information go to: www.continental-industry.com/disc_en