

**Rollin Strip**  
Coating

# Rollin Strip




## Main Application

Coating

### Advantages of the product

- › Strippable blanket specifically designed for Aqueous varnishing
- › Easy to strip thanks to the special compressible layer
- › Excellent transfer and high resistance to varnish pick-up

**Rollin Strip is available in 4ply, 1,95 mm thickness**

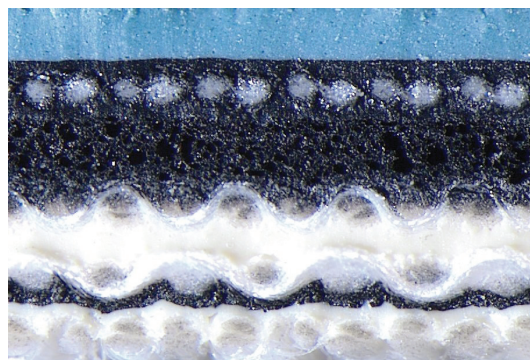

### Guiding Value

		Standard
<b>Color:</b>	Ocean Blue	
<b>Structure:</b>	4 ply	
<b>Surface Roughness Ra*:</b>	0,8 micron	IO LAB TEC 060 - E (internal)
<b>Compressibility @ 0,23 mm*:</b>	3,2 MPa	IO LAB TEC 060 - B (internal)
<b>Thickness +/-0,02 mm*:</b>	1,95 mm	IO LAB TEC 060 - C (internal)
<b>Cutting depth*:</b>	0,6 mm	IO LAB TEC 060 - C (internal)

\* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



**Continental Coated Systems Italy S.p.A**  
 Strada Provinciale 140,  
 26855 Lodi Vecchio, Italy  
[www.continental-industry.com/printing-technology](http://www.continental-industry.com/printing-technology)

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: [www.continental-industry.com/disc/en](http://www.continental-industry.com/disc/en)