

## **Printec 574**

Commercial Sheetfed

# Printec 574




**Main Application**  
Commercial Sheetfed

**Printec 574 is available in 4ply, 1,98 mm thickness**

**Advantages of the product**

- › Top surface for conventional inks
- › Very robust and stable carcass
- › Suitable for high volumes printing

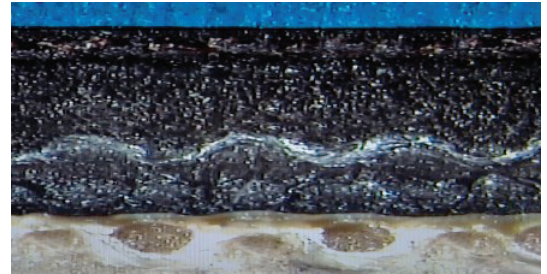

**Guiding Value**

		Standard
<b>Color:</b>	Blue	
<b>Structure:</b>	4 ply	
<b>Surface Roughness Ra*:</b>	1,0 micron	TCSBR-QMS-FOP0105:03 / TCSBR-QMS-FOP0005:07 (internal)
<b>Compressibility @ 0,20 mm*:</b>	1,6 MPa	TCSBR-QMS-FOP0104:03 (internal)
<b>Thickness +/-0,02 mm*:</b>	1,98 mm	ISO 12636

\* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.

 **Continental Indústria e Comercio Brasil Ltda.**  
Via de acesso João de Goes, No. 1.515,  
Barueri, Brazil  
[www.continental-industry.com/printing-technology](http://www.continental-industry.com/printing-technology)

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: [www.continental-industry.com/disc\\_en](http://www.continental-industry.com/disc_en)