

Printec 614
Coating

Printec 614




Main Application
Coating

Printec 614 is available in 4ply, 1,95 mm thickness

Advantages of the product

- › Strippable blanket specifically designed for Aqueous varnishing
- › Easy to strip thanks to the special compressible layer
- › Excellent transfer and high resistance to varnish pick-up

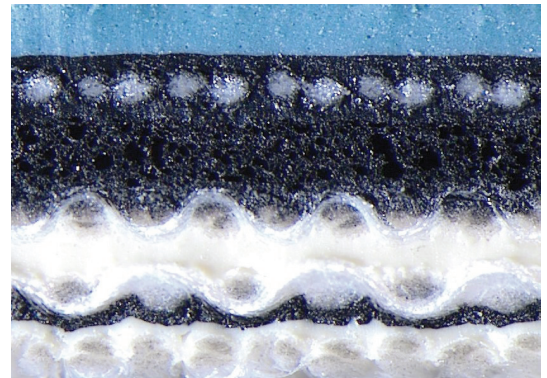

Guiding Value

Standard

Color:	Ocean Blue	
Structure:	4 ply	
Surface Roughness Ra*:	0,8 micron	IO LAB TEC 060 - E (internal)
Compressibility @ 0,23 mm*:	3,2 MPa	IO LAB TEC 060 - B (internal)
Thickness +/-0,02 mm*:	1,95 mm	IO LAB TEC 060 - C (internal)
Cutting depth*:	0,6 mm	IO LAB TEC 060 - C (internal)

* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



Continental Coated Systems Italy S.p.A
Strada Provinciale 140,
26855 Lodi Vecchio, Italy
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: www.continental-industry.com/discl_en