

Printec 334
Packaging

Printec 334




Main Application
Packaging

Printec 334 is available in
3ply, 1,98 mm thickness

Advantages of the product

- › Specifically designed for UV applications
- › Extremely resistant to swelling and embossing from UV inks and blanket washes
- › Good print quality for several jobs on paper and cardboard
- › High smash resistance

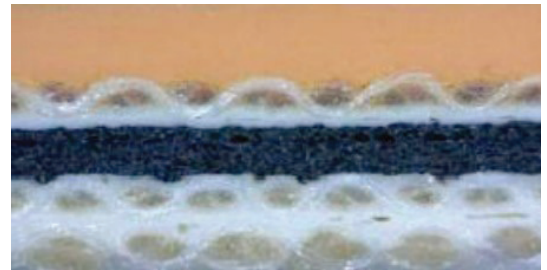

Guiding Value

		Standard
Color:	Orange	
Structure:	3 ply	
Surface Roughness Ra*:	1,0 micron	TCSBR-QMS-FOP0105:03 / TCSBR-QMS-FOP0005:07 (internal)
Compressibility @ 0,20 mm*:	1,6 MPa	TCSBR-QMS-FOP0104:03 (internal)
Thickness +/-0,02 mm*:	1,98 mm	ISO 12636

* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.

 **Continental Indústria e Comercio Brasil Ltda.**
Via de acesso João de Goes, No. 1.515,
Barueri, Brazil
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: www.continental-industry.com/disc_en