



Conveying Solutions

Service Material, Tools and Equipment
EMEA

Continental Industrial Solutions | EMEA

The first choice for material-driven solutions. We connect, convey and cover with passion for our industries.



WE CONNECT, CONVEY,



ContiTech is one of the world's leading industry specialists. The Continental group sector offers its customer connected, environmentally friendly, safe and convenient industrial and service solutions using a range of materials for off-highway applications, on rails and roads, in the air, under and above the ground, in industrial environments, for the food sector and the furniture industry - far beyond our roots as a manufacturer of rubber products.

We act as **ONE ContiTech** creating high-value solutions to connect, convey and cover customer needs.

- › We **connect** customer and market perspectives to understand our customers' expectations in the best way.
- › We **convey** ideas for improvement in our daily business to limit potential dangers and risks along the product life cycle and commit to their reduction.
- › We **cover** any requirements and standards that we have promised to deliver, without compromises.

Quality is our passion.



AND COVER

The ContiTech group sector is divided into 5 business areas:

- › Industrial Solutions for AMERICAS, EMEA, APAC
- › Original Equipment Solutions
- › Surface Solutions

And we offer premium solutions for a wide range of industries:

- › Aerospace
- › Agriculture & Forestry
- › Commercial Vehicles
- › Construction Business
- › Energy Management
- › Food Chain Processing
- › Home, Garden & Leisure
- › Industrial Safety
- › Material Handling
- › Mining
- › Passenger Cars
- › Printing Technology
- › Railway Transport
- › Recycling, Wastewater & Air Treatment
- › Ship, Port & Ocean
- › Urban Mobility



Continental Conveying Solutions

We are the leading expert for conveyor system solutions offering customers worldwide the most complete and advanced product, technology and service portfolio for industry and mining applications. We support our customers, partners, and distributors with a growing range of value-added services along the entire lifetime of a conveyor system operation, from planning and commissioning, to technical advice, training, digital conveyor monitoring, and on-site maintenance. Our cost-effective, sustainable, safe and innovative conveying solutions reduce downtimes through state-of-the-art monitoring and predictive maintenance. We support mining, construction and plant engineering projects around the world as development partner.

Customers benefit from an experience of more than 150 years in high-performance conveyor belts. A network of 1,300 experienced service technicians covers key regions including Africa, Asia, Australia, Europe, North America, and Latin America. With this unique expertise and global footprint, Continental is close to its customers providing not only high-quality, long-life products, but also comprehensive support and service – tailored to customers' specific needs and requirements.

Sheet Rubber Products: Lining Wear Protection CORREX

CORREX Extra	10
CORREX Hard	10
CORREX Beige	11
CORREX Blue	11
CORREX Super	12
CORREX FR	12
CORREX X 65	13

Sheet Rubber Products: Rubber Pulley Lagging CORREX

CORREX Extra	Mini Diamond	16
	Large Diamond	16
	Herringbone	17
CORREX FR	Mini Diamond	18
	Large Diamond	18
CORREX X 65	Mini Diamond	19
CORREX Red	Mini Diamond	19
	Herringbone	20
CORREX Soft	Button Profile	20

Belt Cleaning

ABS Extra	22
ABS Blue	22
ABS Soft	23
ABS Red	23
ABS Combi Scrape	24

Belt Maintenance & Repair

CONREMA Repair Strips	26
CONREMA Repair Sheets	27
CONREMA Filler Rubber	28
CONREMA Repair Fabric EP 160	28

Adhesives, Solutions & Solvents Conti Repair 60SLF Conti Repair Primer and accessories

Conti Secur BFA + Activator RE	30
Conti Secur BFA White + Activator RFE	30
Conti Secur PREMIUM	30
ContiPlus Primer	31
RB Solution	31
Conti Cleaning Solution CCS	31
Conti Repair 60SLF and Conti Repair Primer	31

Tools and Equipment

General tools	34 - 37
Measurement tools	38 - 40
Cutting tools	41 - 44
Saw, drill and grinding technology	45 - 47
Clamping technology	48 - 52
Special tools	53 - 59
Working safety	60 - 61
Merchandise	62 - 63
Tool kits	64 - 67
Construction site equipment	68
Technical questionnaire	69

Service locations	70 - 71
--------------------------	---------

› Physical properties are typical values based on vulcanized compound testing.

› If there are other thicknesses which you are interested in, please ask Continental Customer Service.

	Rubber Type	Specific weight g/cm³	Shore hardness Shore A	Tensile strength Mpa
CORREX Extra	SBR	1.15	63	18
CORREX Hard	SBR	1.16	90	18
CORREX Soft	NR	1.05	45	15
CORREX Beige	NR	1.00	38	20
CORREX Blue	NR	1.11	45	20
CORREX Super	SBR/BR	1.12	60	21
CORREX FR	SBR	1.19	65	24
CORREX Red	SBR	1.26	47	11
CORREX X 65	NBR	1.19	60	23
ABS Extra	SBR	–	60	18
ABS Blue	NR	1.11	45	20
ABS Soft	SBR	1.05	45	15
ABS Red	NR	1.10	45	28
ABS Combi Scrape Properties layers: black/ red/ black	NR	1.09/1.10/1.09	60/45/60	25/28/25



Elongation at break %	Abrasion mm³	Temperature range °C	Profile
450	130	-40 to +60	Smooth, Mini Diamond, Large Diamond, Herringbone
400	120	-30 to +60	Smooth
500	200	-50 to +60	Button Profile
700	230	-50 to +60	Smooth
625	270	-50 to +60	Smooth
550	60	-50 to +60	Smooth
500	110	-40 to +80	Smooth, Mini Diamond, Large Diamond
800	260	-35 to +60	Mini Diamond, Herringbone
700	180	-30 to +100	Smooth, Mini Diamond
450	130	-35 to +100	–
625	270	-50 to +60	–
500	200	-50 to +60	–
700	230	-50 to +60	–
550/700/550	70/230/70	-50 to +60*	–

* same temperature range for all three layers






Sheet Rubber Products: Lining Wear Protection CORREX

Protection against corrosion and abrasion for conveyor belt systems. System surfaces are subject to corrosion and wear. Using CORREX material extends the service life of the system and its maintenance intervals.

CORREX with smooth surface and contact layer

Applications:

- › Abrasion resistant lining
- › Corrosion resistant lining
- › Pulley lagging for non-driven pulleys

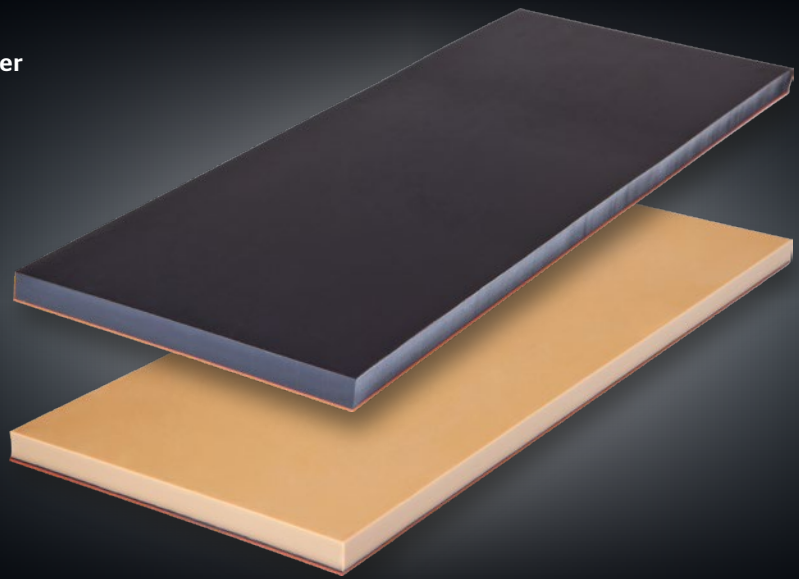

CORREX Extra



Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.15
Shore hardness	Shore A	63
Tensile strength	Mpa	18
Elongation at break	%	450
Abrasion	mm ³	130

Properties:

- › Good abrasion resistance
- › Protection against wear and corrosion
- › Protection against impact deformation
- › CR bonding layer for superior adhesion

Applications:

- › Lagging of non-driven pulleys
- › Lining of pipes, tanks, chutes, material transfer points, trucks, bunkers, silos
- › Industries: steel, mines, ports, cement, chemical industry

CORREX Hard




Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.16
Shore hardness	Shore A	90
Tensile strength	Mpa	18
Elongation at break	%	400
Abrasion	mm ³	120

Properties:

- › Cut resistant surface
- › Good abrasion resistance
- › Nonstick surface
- › Protection against wear and corrosion
- › Protection against impact deformation
- › CR bonding layer for superior adhesion


Applications:

- › Protection against sharp edged bulk material
- › Lining material sharp edged bulk material
- › Chute lining
- › Industries: steel, mines, ports, cement, chemical industry

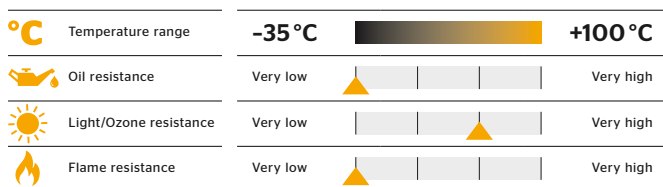

Standard thickness mm	Standard width mm	Standard length m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

Further dimensions on demand.

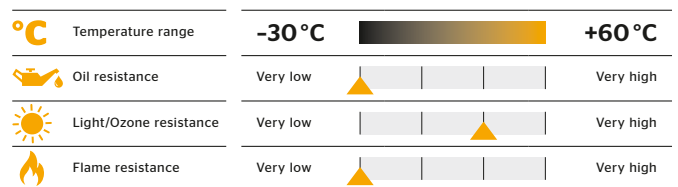

Standard thickness mm	Standard width mm	Standard length m
6	1200	5
8	1200	5
10	1200	5
12	1200	5
15	1200	5
20	1200	5

Further dimensions on demand.

CORREX Beige



Technical data		
Rubber Type		NR
Specific weight	g/cm ³	1,00
Shore hardness	Shore A	38
Tensile strength	Mpa	20
Elongation at break	%	700
Abrasion	mm ³	230

Properties:


- › Good resistance to wet abrasion (gravel, sand)
- › Very elastic material
- › Self-cleaning ability
- › Protection against wear and corrosion
- › Protection against impact deformation
- › CR bonding layer for superior adhesion

Applications:

- › Lining material
- › Chutes, pipe lining, tanks, pumps, floating cells, hoses
- › Lining of shovel buckets to avoid caking
- › Industries: sand, concrete, gravel, glas

Note:


CORREX Beige is also available as CORREX Beige AH with self cleaning surface, upon request.

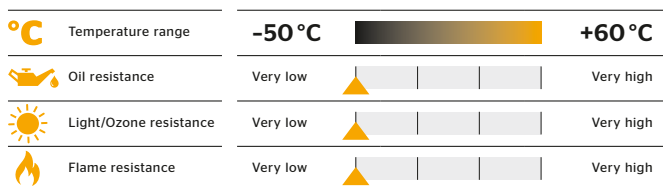

Standard thickness	Standard width	Standard length
mm	mm	m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10

Further dimensions on demand.

CORREX Blue

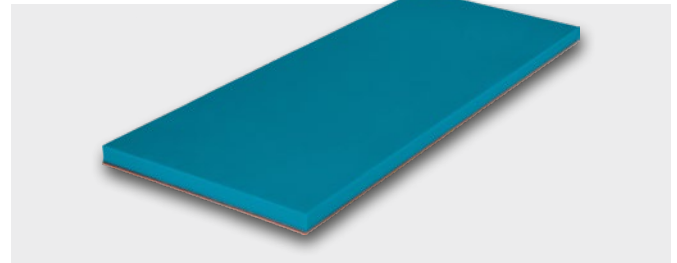


Technical data		
Rubber Type		NR
Specific weight	g/cm ³	1.11
Shore hardness	Shore A	45
Tensile strength	Mpa	20
Elongation at break	%	625
Abrasion	mm ³	270

Properties:

- › Good resistance to wet abrasion (gravel, sand)
- › Self-cleaning ability
- › Very elastic material
- › Protection against wear and corrosion
- › Protection against impact deformation
- › CR bonding layer for superior adhesion

Applications:

- › Lining material
- › Chutes, lining for coal handling, slurry handling, launders
- › Lining of shovel buckets to avoid caking
- › Industries: sand, concrete, gravel, construction

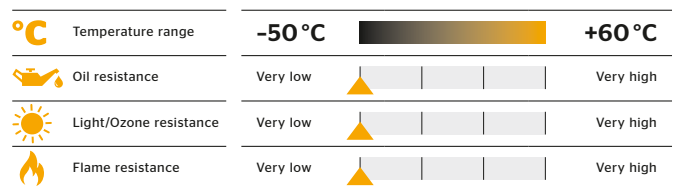

Standard thickness	Standard width	Standard length
mm	mm	m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

Further dimensions on demand.

CORREX Super




Technical data		
Rubber Type		SBR/BR
Specific weight	g/cm ³	1.12
Shore hardness	Shore A	60
Tensile strength	Mpa	21
Elongation at break	%	550
Abrasion	mm ³	60

Properties:

- › High abrasion resistance
- › Especially suitable for use in low temperature environments
- › Protection against wear and corrosion
- › Protection against impact deformation
- › CR bonding layer for superior adhesion

Applications:


- › Lagging of non-driven pulleys
- › Lining of pipes, tanks, chutes, material transfer points, trucks, bunkers, silos
- › Industries: steel, mines, ports, chemical industry

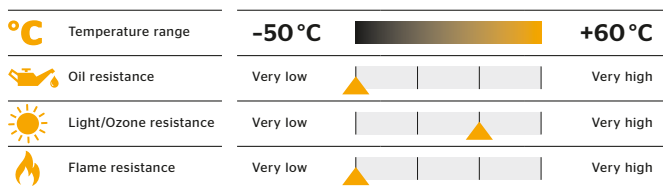

Standard thickness	Standard width	Standard length
mm	mm	m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

Further dimensions on demand.

CORREX FR

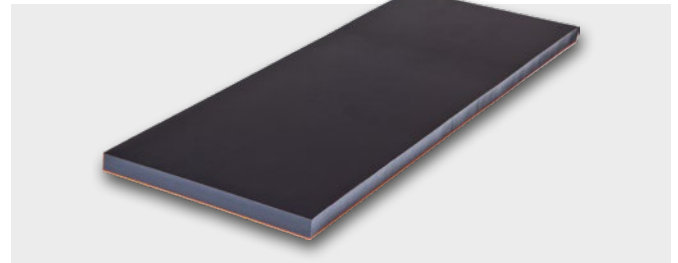


Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.19
Shore hardness	Shore A	65
Tensile strength	Mpa	24
Elongation at break	%	500
Abrasion	mm ³	110

Properties:

- › Flame Resistance according to ISO 340
- › Surface Resistance according to ISO 284
- › Protection against impact deformation
- › Protection against wear and corrosion
- › CR bonding layer for superior adhesion

Applications:

- › Lining material
- › Lining of pipes, tanks, chutes, material transfer points, trucks, bunkers, silos
- › Industries: steel, mining, cement, chemical industry

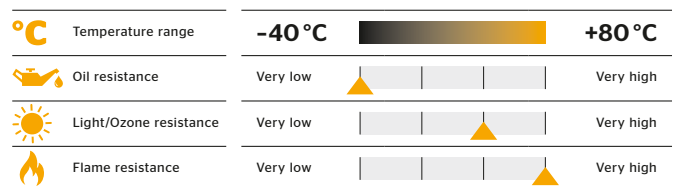

Standard thickness	Standard width	Standard length
mm	mm	m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

Further dimensions on demand.

CORREX X 65




Technical data		
Rubber Type		NBR
Specific weight	g/cm ³	1.19
Shore hardness	Shore A	60
Tensile strength	Mpa	23
Elongation at break	%	700
Abrasion	mm ³	180

Properties:

- › Good oil resistance
- › Protection against wear and corrosion
- › Protection against impact deformation
- › CR bonding layer for superior adhesion

Applications:

- › Lining material
- › Lining of pipes, tanks, chutes, material transfer points, trucks, bunkers, silos
- › Industries: wood, chemical, fertilizer

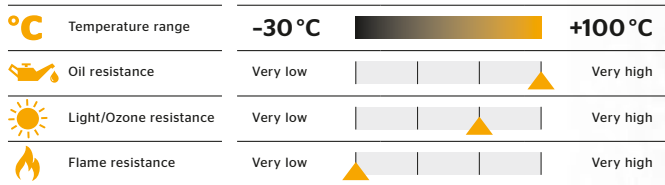

Standard thickness mm	Standard width mm	Standard length m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

Further dimensions on demand.






Sheet Rubber Products: Rubber Pulley Lagging CORREX

To improve the coefficient of friction between the conveyor belt and the drive pulley and to ensure friction grip even under unfavorable drive ratio – such as, for example, dampness or contamination – the pulleys are lagged with profiled rubber.


CORREX with profile and contact layer

Applications:

- › Lagging of driven pulleys and non-driven pulleys
- › Various profiles for various belt sizes and qualities

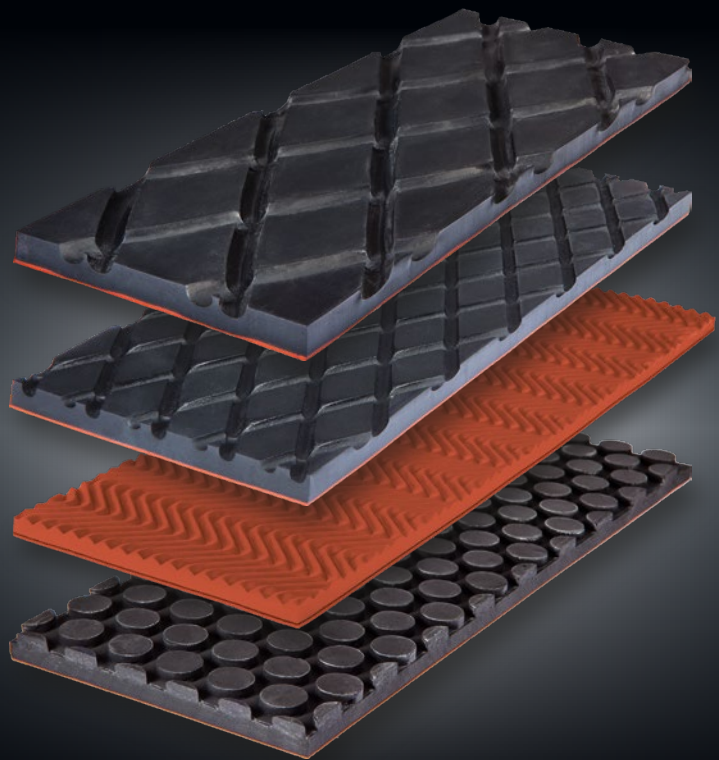

CORREX Extra Mini Diamond

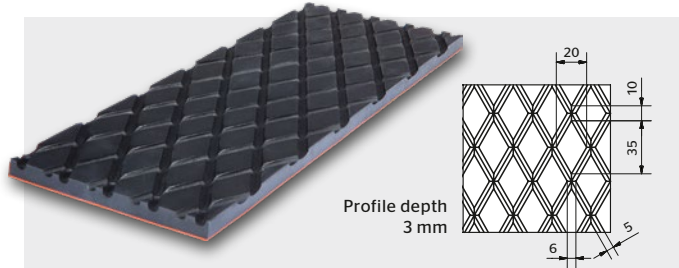


Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.15
Shore hardness	Shore A	63
Tensile strength	Mpa	18
Elongation at break	%	450
Abrasion	mm ³	130

Properties:

- › Good abrasion resistance
- › Improves friction between drive pulley and belt
- › Protection against wear and corrosion
- › Drains off moisture and dirt
- › Prevents material build up
- › CR bonding layer for superior adhesion

Applications:


- › Lagging of driven pulleys and non-driven pulleys
- › For fabric and steelcord belts
- › For various pulley diameters
- › Industries: steel, mines, ports, cement, chemical industry

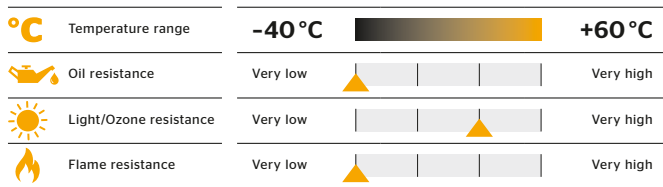

Standard thickness mm	Standard width mm	Standard length m
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

Further profiles and dimensions on demand.

CORREX Extra Large Diamond

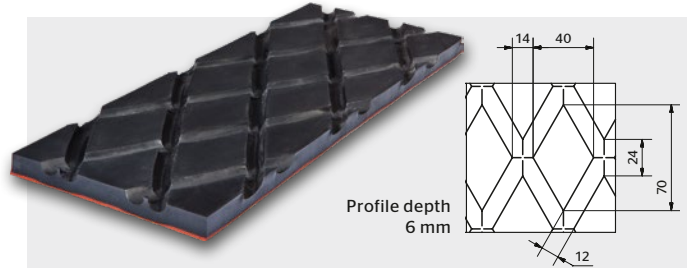


Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.15
Shore hardness	Shore A	63
Tensile strength	Mpa	18
Elongation at break	%	450
Abrasion	mm ³	130

Properties:

- › Good abrasion resistance
- › Improves friction between drive pulley and belt
- › Protection against wear and corrosion
- › Drains off moisture and dirt
- › Prevents material build up
- › CR bonding layer for superior adhesion

Applications:

- › Lagging of driven pulleys and non-driven pulleys
- › For fabric and steelcord belts
- › For pulley diameters with more than 500 mm
- › Industries: steel, mines, ports, cement, chemical industry

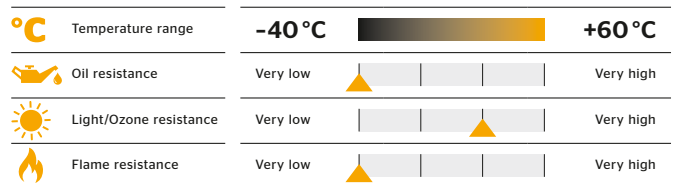


Standard thickness mm	Standard width mm	Standard length m
10	2000	10
12	2000	10
15	2000	10
20	2000	10
25	2000	10

Further profiles and dimensions on demand.

CORREX Extra

Herringbone

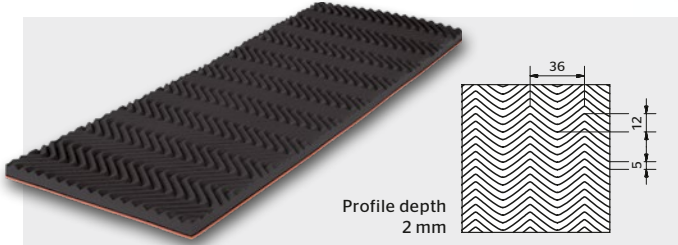

Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.15
Shore hardness	Shore A	63
Tensile strength	Mpa	18
Elongation at break	%	450
Abrasion	mm ³	130

Properties:

- › Good abrasion resistance
- › Improves friction between drive pulley and belt
- › Protection against wear and corrosion
- › Drains off moisture and dirt
- › Open profile provides for good self cleaning ability
- › Prevents material build up
- › CR bonding layer for superior adhesion

Applications:

- › Lagging of driven pulleys and non-driven pulleys with small diameters
- › Especially for wet applications
- › For various pulley diameters
- › Industries: steel, mines, ports, cement, chemical industry

°C	Temperature range	-40°C		+60°C
	Oil resistance	Very low		Very high
	Light/Ozone resistance	Very low		Very high
	Flame resistance	Very low		Very high


Standard thickness	Standard width	Standard length
mm	mm	m
6	1400	10
8	1400	10
10	1400	10

Further profiles and dimensions on demand.



CORREX FR

Mini Diamond

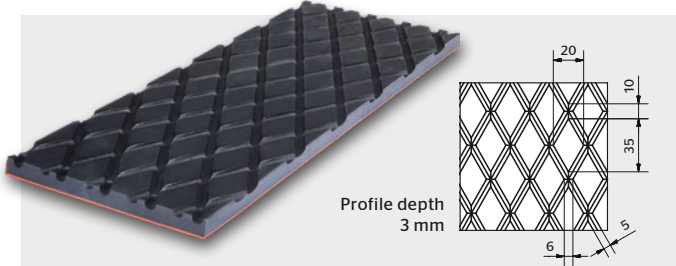

Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.19
Shore hardness	Shore A	65
Tensile strength	Mpa	24
Elongation at break	%	500
Abrasion	mm ³	110

Properties:


- › Flame Resistance according to ISO 340
- › Surface Resistance according to ISO 284
- › Improves friction between drive pulley and belt
- › Protection against wear and corrosion
- › Drains off moisture and dirt
- › CR bonding layer for superior adhesion

Applications:

- › Lagging of driven pulleys and non-driven pulleys
- › For fabric and steelcord belts
- › For various pulley diameters
- › Industries: steel, mining, cement, chemical industry

CORREX FR

Large Diamond

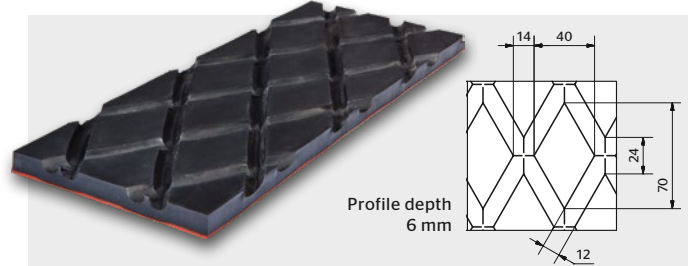


Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.19
Shore hardness	Shore A	65
Tensile strength	Mpa	24
Elongation at break	%	500
Abrasion	mm ³	110

Properties:

- › Flame Resistance according to ISO 340
- › Surface Resistance according to ISO 284
- › Improves friction between drive pulley and belt
- › Protection against wear and corrosion
- › Drains off moisture and dirt
- › CR bonding layer for superior adhesion


Applications:

- › Lagging of driven pulleys and non-driven pulleys
- › For fabric and steelcord belts
- › For pulley diameters with more than 500 mm
- › Industries: steel, mining, cement, chemical industry

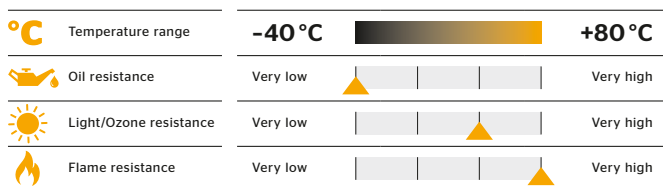

Standard thickness	Standard width	Standard length
mm	mm	m
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10
25	2000	10

Further profiles and dimensions on demand.

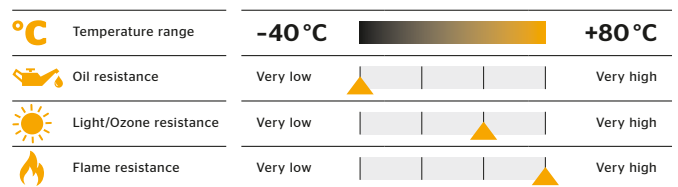


Standard thickness	Standard width	Standard length
mm	mm	m
10	2000	10
12	2000	10
15	2000	10
20	2000	10
25	2000	10

Further profiles and dimensions on demand.

CORREX X 65

Mini Diamond

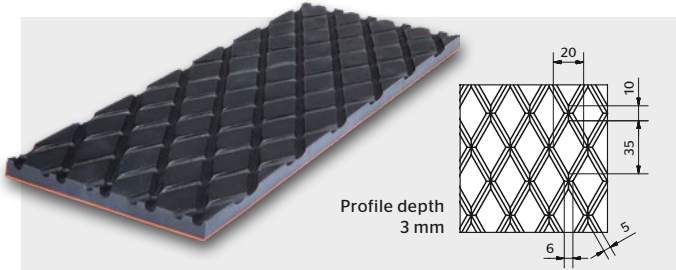


Technical data		
Rubber Type		NBR
Specific weight	g/cm ³	1.19
Shore hardness	Shore A	60
Tensile strength	Mpa	23
Elongation at break	%	700
Abrasion	mm ³	180

Properties:

- › Good oil resistance
- › Protection against wear and corrosion
- › Drains off moisture and dirt
- › CR bonding layer for superior adhesion

Applications:

- › Lagging of driven pulleys and non-driven pulleys
- › For fabric and steelcord belts
- › For various pulley diameters
- › Industries: wood, chemical, fertilizer

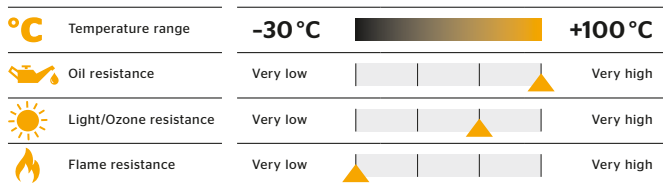


Standard thickness	Standard width	Standard length
mm	mm	m
8	1300	10
10	1300	10

Further profiles and dimensions on demand.

CORREX Red

Mini Diamond

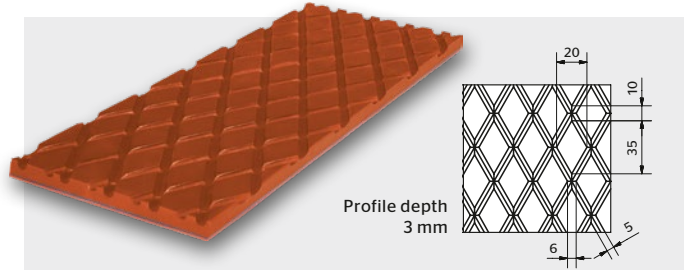


Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.26
Shore hardness	Shore A	47
Tensile strength	Mpa	11
Elongation at break	%	800
Abrasion	mm ³	260

Properties:

- › Good resistance to wet abrasion (gravel, sand)
- › Self-cleaning ability
- › Very elastic material
- › Improves friction between drive pulley and belt
- › Protection against wear and corrosion
- › Drains off moisture and dirt
- › Prevents material build up
- › CR bonding layer for superior adhesion

Applications:


- › Lagging of driven pulleys and non-driven pulleys
- › Wet environments
- › For various pulley diameters
- › Gravel and sand industry

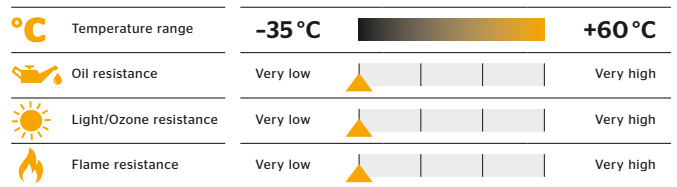

Standard thickness	Standard width	Standard length
mm	mm	m
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10
25	2000	10

Further profiles and dimensions on demand.

CORREX Red Herringbone

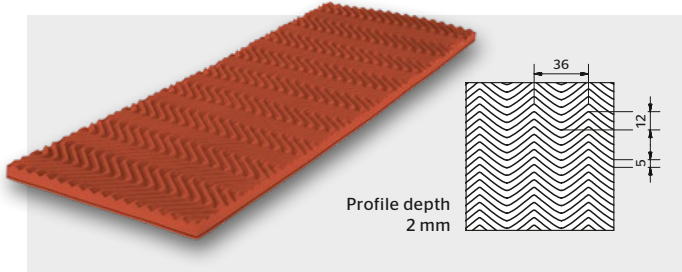


Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.26
Shore hardness	Shore A	47
Tensile strength	Mpa	11
Elongation at break	%	800
Abrasion	mm ³	260

Properties:

- › Good resistance to wet abrasion (gravel, sand)
- › Self-cleaning ability
- › Very elastic material
- › Improves friction between drive pulley and belt
- › Protection against wear and corrosion
- › Drains off moisture and dirt
- › Open profile provides for good self cleaning ability
- › Prevents material build up
- › CR bonding layer for superior adhesion

Applications:


- › Lagging of driven pulleys and non-driven pulleys with small diameters
- › Wet environments
- › Gravel and sand industry

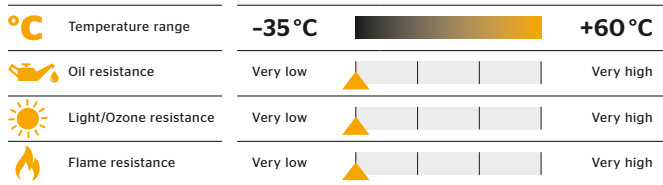

Standard thickness	Standard width	Standard length
mm	mm	m
6	1400	10
8	1400	10
10	1400	10

Further profiles and dimensions on demand.

CORREX Soft Button Profile

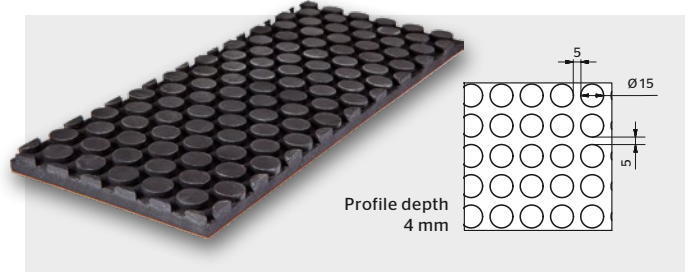


Technical data		
Rubber Type		NR
Specific weight	g/cm ³	1.05
Shore hardness	Shore A	45
Tensile strength	Mpa	15
Elongation at break	%	500
Abrasion	mm ³	200

Properties:

- › Soft material compensates belt movement
- › Good abrasion resistance
- › Good resistance to build up of wet bulk material
- › Very elastic material
- › Self cleaning ability
- › Improves friction between drive pulley and belt
- › Protection against wear and corrosion
- › Drains off moisture and dirt
- › Prevents material build up
- › CR bonding layer for superior adhesion

Applications:

- › Lagging of driven pulleys and non-driven pulleys
- › Wet applications
- › For various pulley diameters
- › Industries: sand, concrete, gravel, construction

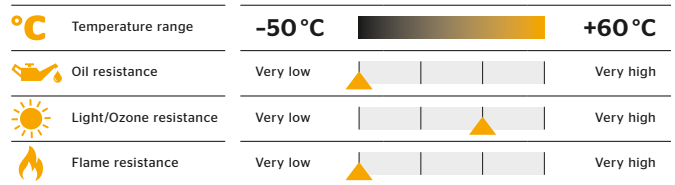

Standard thickness	Standard width	Standard length
mm	mm	m
8	1300	10
10	1300	10
12	1300	10

Further profiles and dimensions on demand.


Belt Cleaning

ABS are vulcanized rubber sheets with smooth surface for many applications including skirtboard and scraper rubber for conveyor belt systems. Various other applications are possible. ABS rubber sheets are available in the same specifications as CORREX but have no contact layer.

ABS rubber sheets

Applications:

- › Skirtboard rubber
- › Scraper rubber
- › Various other applications

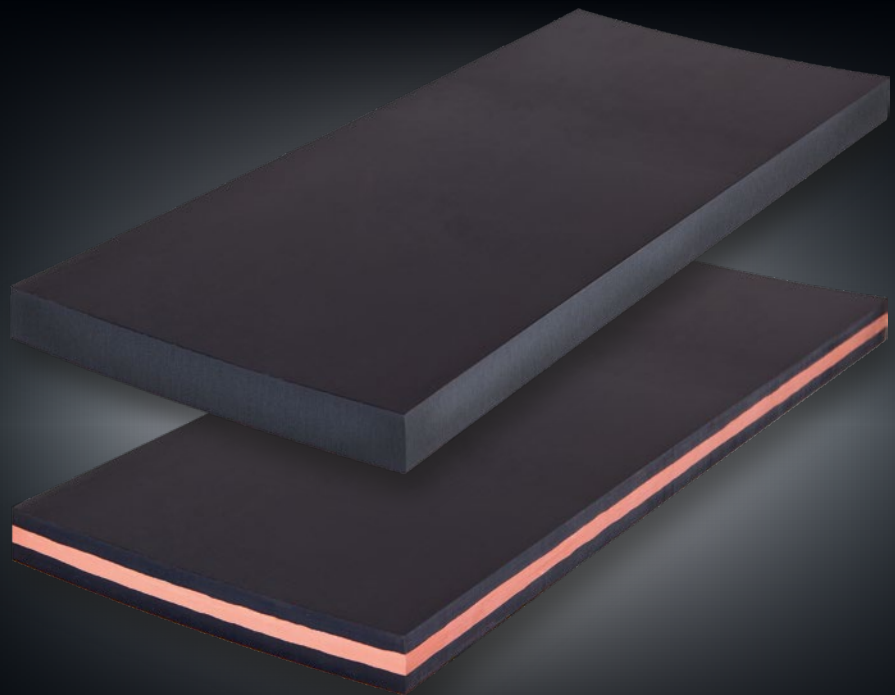

ABS Extra



Technical data		
Rubber Type		SBR
Shore hardness	Shore A	60
Tensile strength	Mpa	18
Elongation at break	%	450
Abrasion	mm ³	130


Properties:

- › Good abrasion resistance

Applications:

- › Scraper rubber
- › Gaskets rubber
- › Lining material
- › Blankets
- › Skirtboard rubber

ABS Blue

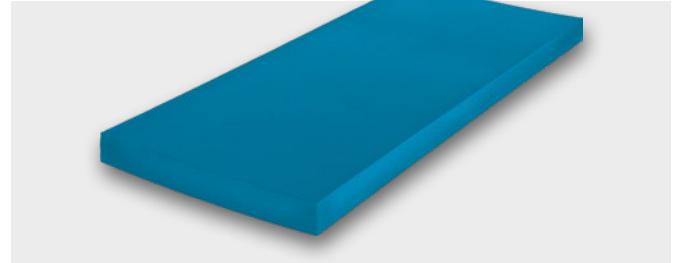


Technical data		
Rubber Type		NR
Specific weight	g/cm ³	1.11
Shore hardness	Shore A	45
Tensile strength	Mpa	20
Elongation at break	%	625
Abrasion	mm ³	270

Properties:


- › Good resistance to wet abrasion (gravel, sand)
- › Self-cleaning ability
- › Very elastic material

Applications:

- › Scraper rubber
- › Gaskets rubber
- › Lining material
- › Blankets
- › Skirtboard rubber

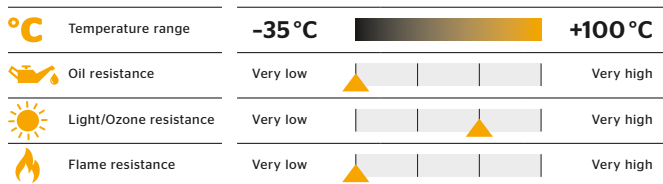

Standard thickness	Standard width	Standard length
mm	mm	m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

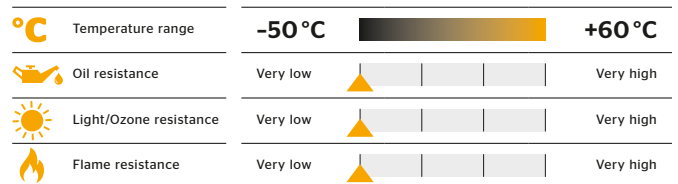

Standard thickness	Standard width	Standard length
mm	mm	m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

ABS Soft




Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.05
Shore hardness	Shore A	45
Tensile strength	Mpa	15
Elongation at break	%	500
Abrasion	mm ³	200

Properties:

- › Good resistance to build up of wet bulk material
- › Good resistance to wet abrasion (gravel, sand)
- › Very elastic material
- › Self cleaning ability

Applications:

- › Scraper rubber
- › Gaskets rubber
- › Lining material
- › Blankets
- › Skirtboard rubber

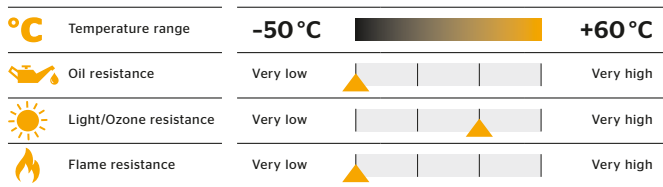

Standard thickness	Standard width	Standard length
mm	mm	m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

ABS Red




Technical data		
Rubber Type		NR
Specific weight	g/cm ³	1.10
Shore hardness	Shore A	45
Tensile strength	Mpa	28
Elongation at break	%	700
Abrasion	mm ³	230

Properties:

- › Good resistance to wet abrasion (gravel, sand)
- › Self-cleaning ability
- › Very elastic material
- › Prevents material build up

Applications:

- › Scraper rubber
- › Gaskets rubber
- › Lining material
- › Blankets
- › Skirtboard rubber

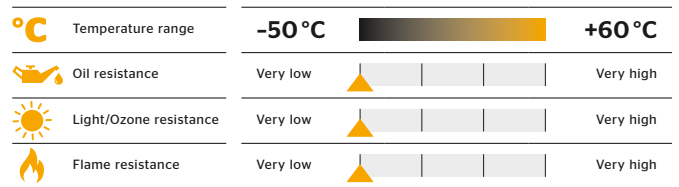

Standard thickness	Standard width	Standard length
mm	mm	m
4	1200	10
6	2000	10
8	2000	10
10	2000	10
12	2000	10
15	2000	10
20	2000	10

ABS Combi Scrape



Technical data		layers: black / red / black
Rubber Type		NR
Specific weight	g/cm ³	1.09 / 1.10 / 1.09
Shore hardness	Shore A	60 / 45 / 60
Tensile strength	Mpa	25 / 28 / 25
Elongation at break	%	550 / 700 / 550
Abrasion	mm ³	70 / 230 / 70

Properties:

- › Red compound: soft for better cleaning ability
- › Black compound: supports the stiffness of the scraper rubber
- › Self cleaning ability

Applications:

- › Scraper rubber
- › Skirtboard rubber

°C Temperature range	-50 °C		+60 °C
Oil resistance	Very low		Very high
Light/Ozone resistance	Very low		Very high
Flame resistance	Very low		Very high

Standard thickness	Standard width	Standard length
mm	mm	m
20	1200	10

Belt Maintenance & Repair

The service life of a conveyor belt depends on the maintenance of the system and of the conveyor belt itself. CONREMA cold repair material helps to extend the lifetime of the belt and to keep costly downtime to a minimum.

CONREMA repair material

Applications:

- › Cold repair of textile and steel cord belts



CONREMA Repair Strips




Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.15
Shore hardness	Shore A	63
Tensile strength	Mpa	18
Elongation at break	%	450
Abrasion	mm ³	130

Properties:

- › Feathered edges
- › CR bonding layer with superior adhesion
- › For cold bond repairs


Applications:

- › For use with general purpose belt compounds

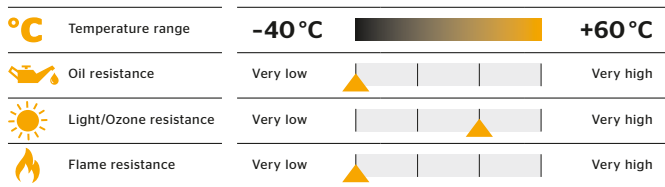

Standard thickness	Standard width	Standard length	Fabric reinforcement	Bonding layer
mm	mm	m		
2	50	10	no	One side
2	70	10	no	One side
2	100	10	no	One side
2	150	10	no	One side
2	220	10	no	One side
2	300	10	no	One side
3	100	10	yes	One side
3	150	10	yes	One side
3	220	10	yes	One side
3	300	10	yes	One side

CONREMA Repair Sheets

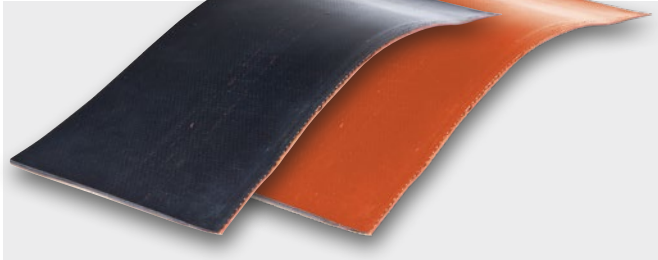


Technical data		
Rubber Type		SBR
Specific weight	g/cm ³	1.15
Shore hardness	Shore A	63
Tensile strength	Mpa	18
Elongation at break	%	450
Abrasion	mm ³	130

Properties:

- › CR bonding layer for superior adhesion
- › Cut edges
- › For cold bond repairs

Applications:

- › Belt cover repairs
- › Belt edge repairs

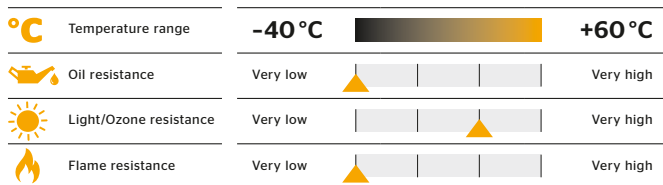

Standard thickness	Standard width	Standard length	Bonding layer
mm	mm	m	
3	500	5	One side
1.5	500	5	Both sides
3	500	5	Both sides

CONREMA Filler Rubber




Technical data		
Rubber Type		CR
Specific weight	g/cm ³	1.46

Properties:

- › Sheet of CR bonding layer

Applications:

- › Filler rubber for belt cover and edge repair
- › For cold bond repairs

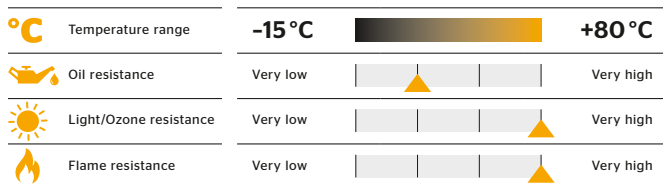

Standard thickness	Standard width	Standard length
mm	mm	m
0.8	1200	10

CONREMA Repair Fabric EP 160




Technical data		
Rubber Type		CR

Properties:

- › Rubber coated belt fabric

Applications:

- › Repair of textile belt carcasses
- › For cold bond repairs

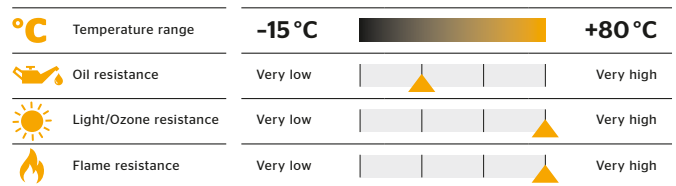

Standard thickness	Standard width	Standard length
mm	mm	m
2.2	1200	10






Adhesives, Solutions & Solvents





Continental offers a comprehensive range of various Adhesives, Solutions & Solvents for cold and hot bonding, cleaning and repair of conveyor belts.



Adhesives, Solutions & Solvents

For belt splices and certain repairs

Adhesives, Solutions & Solvents			
Conti Secur BFA			<ul style="list-style-type: none"> › Two component cold bonding adhesive › For rubber-rubber, rubber-metal and rubber-fabric bonding › Drum lagging, chute lining, cold splicing › Bonding of cleats and sidewalls › REACH compliant
0.8 l	0.7 kg		
4.8 l	4.2 kg		
22.2 l	19.5 kg		
200.0 l	165.0 kg		
Activator RE			<ul style="list-style-type: none"> › Activator for Conti Secur BFA - 1 x 40g needed for 0.8 liter BFA container - 6 x 40g needed for 4.8 liter BFA container - 30 x 40g needed for 22.2 liter BFA container - 13 x 750g needed for 200 liter BFA container
	12 x 40 g		
	30 x 40 g		
	750 g		
Conti Secur BFA White			<ul style="list-style-type: none"> › White two component cold bonding adhesive for the cold bonding of white and colored rubber material › For rubber-rubber, rubber-metal and rubber-fabric bonding › Drum lagging, chute lining, cold splicing › Bonding of cleats and sidewalls
0.8 l	0.7 kg		
22.2 l	19.5 kg		
Activator RFE			<ul style="list-style-type: none"> › Activator for Conti Secur BFA white - 1 x 40g needed for 0.8 liter BFA White container - 30 x 40g needed for 22.2 liter BFA White container
	12 x 40 g		
Conti Secur PREMIUM			<ul style="list-style-type: none"> › One component cold bonding adhesive › Highly economical and user-friendly › For rubber-rubber, rubber-metal and rubber-fabric bonding › Only for static and low tension applications
0.8 l	0.7 kg		
4.8 l	4.2 kg		




Adhesives, Solutions & Solvents			
ContiPlus Primer			<ul style="list-style-type: none"> › Primer for rubber-metal bonding › Increases adhesion between metal and rubber
0.75 l	0.7 kg		
RB Solution			<ul style="list-style-type: none"> › Hot splicing cement › General hot splicing and splicing of SBR heat resistant belts
0.73 l	0.6 kg		
4.9 l	4.0 kg		
24.3 l	20.0 kg		
Conti Cleaning Solution CCS			<ul style="list-style-type: none"> › Solvent for cleaning of rubber and steel surfaces › Refreshing of aged bonding layers
1.0 l	0.8 kg		
5.0 l	4.0 kg		
Conti Repair 60SLF			<ul style="list-style-type: none"> › Polyurethane paste for belt repair › Self Leveling, Fast Cure › Enhanced bonding with Conti Repair Primer
2x 200 ml			
2x 750 ml			
Conti Repair Primer 115 g			
<p>Note: For accessories, contact local Continental Sales</p>			



Tools and Equipment

As a systems supplier, we provide everything required for every conveyor system. From a perfectly adapted range of maintenance and repair materials to belt system accessories, we offer high-quality tools for conveyor belt repairs.








Thanks to our extensive industry expertise, we know exactly which requirements the tools must meet, and provide everything you need to work successfully and efficiently. Our cooperation with selected manufacturers also guarantees a high standard of quality and impressive products offering the best possible value.



You'll find everything you need for belt repairs and belt splicing, from barrier tape through offset screwdrivers.

General tools

For belt splicing and conveyor belt repairs

Art.-No.	General tools		
4110054402	Locksmith's hammer with Ultratec handle - Weight without handle: 500 g / 1.1 lbs. - Handle length = 330 mm / 13 in.		<ul style="list-style-type: none"> › Hammer head according to DIN 1041, from quality steel, handle inseparably connected to hammer head, Ultratec handle from 3 components with fibreglas score, unbreakable
4110054403	Hammer - Hammerhead: 70 x 140 mm / 2.8 x 5.5 in.		<ul style="list-style-type: none"> › With duroplastic filler › Tool for scratch-sensitive objects › Handle 90° adjustable
4110054470	Hammer - Hammerhead: 70 x 70 mm / 2.8 x 2.8 in.		
4110054404	Water pump pliers - Total length: 250 mm / 9.84 in. - Grip width: 40 mm / 1.57 in.		<ul style="list-style-type: none"> › DIN ISO 5231 D, with handy profiled grips, box slip joint, 7 settings, from chrome vanadium steel › Version: red painted, jaws and frame polished
4110054405	Special pincers - Length: 300 mm / 11.8 in.		<ul style="list-style-type: none"> › For the heaviest loads, precise machining, high wear resistance and balanced weight distribution › Material: Special tool steel, › Grip: black atramentized
4110054406	Workshop screwdrivers - Blade: 5.5 x 1.0 mm / 0.22 x 0.04 in. - Blade length: 125 mm / 4.92 in. - Total length: 232 mm / 9.13 in.		<ul style="list-style-type: none"> › For slotted screws › Grip: With 3-component grip, ergonomic triangular form corresponds to the ideal turning angle of the hand (120°), with quick-turn zone and slip guard in soft plastic, highly impact resistant core, rollaway guard through triangular collar › Blade: Highly tempered special steel, matt chrome plated, permanently identified, with black blade tip
4110054408	Allen wrench sets - Set arrangement: 1.5, 2, 2.5, 3, 4, 5, 6, 8 and 10 mm		<ul style="list-style-type: none"> › Extra long version › With ball head › Each 9-piece in fold out holder › Nickel plated

Art.-No.	General tools		
4110054409	Combination spanner set - Set arrangement in carton: 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19 and 22 mm		<ul style="list-style-type: none"> › DIN 3113, Form A › With same wrench widths › Box wrench head offset 15° › Chrome vanadium steel, chrome plated › Slender, stable form
4110054412	All-steel screw clamps - Clamping width: 300 mm / 11.8 in. - Reach: 140 mm / 5.5 in. - Rail: 25 x 12 mm / 0.98 x 0.47 in.		<ul style="list-style-type: none"> › With ergonomically formed 2-component triangular grip for maximum force transmission (100 mm / 3.94 in. with wood handle) › Fixed arm from cold drawn steel › Sliding arm drop forged, tempered, galvanized › Spindle burnished with movable pressure plate
4110054413	Round brush with bristle support Size 8 (35 mm / 1.38 in.)		<ul style="list-style-type: none"> › For the application of adhesives and solutions.
4110054414	Round brush with bristle support Size 10 (40 mm / 1.57 in.)		
4110054415	Round brush with bristle support Size 12 (45 mm / 1.77 in.)		
4110054426	Round brush with bristle support Size 14 (50 mm / 1.97 in.)		
4110054416	Hand broom - Wood body, straight, with rounded grip edges, approx. 315 x 35 mm / 12.4 x 1.38 in. - Bristle length: approx. 60 mm / 2.36 in.		<ul style="list-style-type: none"> › Hole for hanging › Fill: horsehair
4110054417	Whetstone - Dimension: 230 x 35 x 14 mm / 9.06 x 1.38 x 0.55 in.		<ul style="list-style-type: none"> › Whetstone oval
4110054418	Cable drum - Cable length: 50 m / approx. 164 ft. - Cable version: Rubber H05 RR-F 3 x 1.5 mm ²		<ul style="list-style-type: none"> › 230 V, for short-term outdoor use, IP 44, with dual safety system, from galvanized sheet steel, 3 grounded sockets with protective caps, stable, shock-dampening steel tube frame, doubled safety through built-in automatic overheating and accident protection, with optical display › Drum: galvanized sheet steel

General tools

For belt splicing and conveyor belt repairs








Art.-No.	General tools		
4110054419	Extension cable for outdoor use - Cable length: 10 m / approx. 32.8 ft. - Cable version: Rubber H07 RN-F 3 x 1.5 mm ²	 	<ul style="list-style-type: none"> › 230 V, for outdoor use, IP 44, with grounded plug and coupling with cover › With practical wall bracket
4110054463	Mains adapter		<ul style="list-style-type: none"> › Seven connectors for more than 150 countries worldwide › The safe and universal mains adapter for the connection of electrical devices with German connectors to sockets in countries with different systems › Simple and safe to use › With German safety socket and seven connector inserts, incl. cloth bag › Max. load 250V 16A, depending on national regulations › Please note: The travel plug is not a voltage and frequency converter
4110054420	Makita UB 1103 electronic blower / vacuum Specifications: - Continuous rating input: 600 W - No load speed: 0 - 16,000 rpm - Overall length: 479 mm / 18.9 in. - Width: 185 mm / 7.28 in. - Height: 178 mm / 7.01 in. - Air flow: 0 - 4.1 m ³ /min - Air pressure: 0 - 5.7 kPa - Net weight: 2 kg / 4.3 lbs.		<ul style="list-style-type: none"> › Anti-static cleaning, vacuuming and drying › Can be used as a vacuum with bag supplied, blower or suction device › Ergonomic handle for comfortable use in both horizontal and downward applications › Large trigger with conveniently located lock-on button › Dust bag supplied as an optional accessory <p>Standard accessories:</p> <ul style="list-style-type: none"> › Nozzle: 220 mm / 8.66 in. › Dust bag
4110054422	Silver refills Line width: M		<ul style="list-style-type: none"> › For writing on dark media e.g. rubber, leather etc.. The writing and marking should only be done on the smooth surface of the leather. It can be removed with an eraser if necessary. › Color: silver
4110054471	"Pentel" pen - 4 mm / 0.16 in. guide tube - Content: 12.0 ml (solvent-free)	 	<ul style="list-style-type: none"> › White pen for labeling and marking conveyor belts › For extra fine lettering › Quick-drying
4110054423	Pen white - PU: 12		<ul style="list-style-type: none"> › Glasochrom 108 20-0 › Permanent coloured pencil for all, especially smooth surface › Wood from certified, sustainably managed forests

Art.-No.	General tools	
4110054491	„Tipp-Ex“ pen - Content: 15 ml	 <ul style="list-style-type: none"> › White pen for labeling and marking conveyor belts or other rubber surfaces › Extra fine lettering without spillage › Quick-drying › Ergonomic design
4110054476	Edding 950 - Line width approx. 10 mm	 <ul style="list-style-type: none"> › Yellow pen for labeling and marking conveyor belts or other rubber surfaces › Water resistant › Non fade › Heat resistant
4110054424	Tool bag - Dimension: 770 x 330 mm / 30.3 x 13 in. - Weight: 340 g / 0.8 lbs	 <ul style="list-style-type: none"> › Faux leather without tools › Number of pockets: 20 › Tool bag will be delivered without tools
4110054425	Tool case 120.03/P - Internal dimensions: 470 x 370 x 190 mm / 18.5 x 14.57 x 7.48 in. - External dimensions: 500 x 425 x 210 mm / 19.69 x 16.73 x 8.27 in. - Weight: 4.8 kg / 10.6 lbs - Volume: 33 l - Payload: 30 kg / 66.1 lbs - Material: ABS	 <ul style="list-style-type: none"> › Case shells made of robust ABS-material › A robust aluminium frame with rim protection › Four bottom feet keep the shell scratchfree and ensure greater stability › Two lockable metal cliplocks › Combination lock › Ergonomic handle › Comfortable lid holder and hinge cover › Variable bottom shell › Tool case will be delivered without tools
4110054442	FACOM tool bag, Probag (47 Litre) - Colour: red, black - Size: 510 x 370 x 220 mm / 20.08 x 14.57 x 8.66 in. - Weight (without tools): 2.8 kg / 6.2 lbs	 <p>Heavy duty design:</p> <ul style="list-style-type: none"> › Very high strength 1,200 x 1,200 denier fabric › Rigid, waterproof tool compartment › Aluminium handle <p>Protection and comfort:</p> <ul style="list-style-type: none"> › Leather grip › Padded shoulder strap <p>Handy storage:</p> <ul style="list-style-type: none"> › Elastic tool retaining strap › Special screwdriver partition › Easy access to the tool compartment › Large number of side pockets › Adjustable saw compartment with selfadhesive strips › Flap top storage pouch

Measurement tools







Used to determine geometric and physical data

Art.-No.	Measurement tools		
4110054501	Folding rule, wood - Number of sections = 10 - Length = 2 m / 6.56 in. - Width = 16 mm / 0.63 in.		<ul style="list-style-type: none"> › From seasoned beech › Weather-resistant paint › Black gradation marks › Red decimal numbers › With mm gradations both sides › Steel nibs, brass plated
4110054502	Pocket measuring tape, extra stable - Measuring length: 5 m / 16 ft. - Tape width: 19 mm / 0.75 in. - Housing size: 70 x 72 x 37 mm / 2.76 x 2.83 x 1.46 in.		<ul style="list-style-type: none"> › Tape according to EU accuracy class II › Very robust housing from 2-component ABS plastic with belt clip › Softgrip version - ergonomic and firm grip › Automatic tape rewind with tape stop and lock button › Tape measure with extremely high anti-kink stability › Gradation mm / cm › Tape with 3-river black end hook
4110054503	Measuring tape in frame - 20 Meter / 65 ft.		<ul style="list-style-type: none"> › From light alloy with ball bearing quick rewind and optimal tape guidance. Can be modified for left-handed users. Ergonomically formed, impact-proof pistol grip, anti-slip soft rubber knobs.
4110054504	Measuring tape in frame - 30 Meter / 98 ft.		<ul style="list-style-type: none"> › Straight frame to 20 m / 65 ft. › V frame from 30 m / 98 ft.
4110054505	Measuring tape in frame - 50 Meter / 164 ft.		 <ul style="list-style-type: none"> › White painted stainless steel tape measure: Continuous mm gradation. Hardened spring tape with carbon steel C75 and additional corrosion protection. White synthetic resin enameled. Printed gradation with red meter pre-digits and clear paint coating.
4110054506	Plumb lines - Plumb lines on 50 m / 164 ft. coils		<ul style="list-style-type: none"> › Colour: red › Line thickness: 1.7 mm / 0.07 in. › Material: polyamide
4110054507	Chalk line reel - Chalk line, 1 x 30 m / 1 x 98 ft., translation 1:1		<ul style="list-style-type: none"> › Aluminum housing, plumb form

Art.-No.	Measurement tools		
4110054509	Chalk line powder - Coloured powder bottle, blue, 100 g / 0.22 lbs		
4110054523	Chalk line powder - Coloured powder bottle, yellow, 227 g / 0.5 lbs		
4110054510	Carpenter's square - 1 side mm / mm		<ul style="list-style-type: none"> › With steel blade (32 mm width) and die-cast arm › With mitre › With two graduations
4110054511	Micrometer 3003 d (small) - Measuring range [B]: 0 - 50 mm / 0 - 1.97 in. - Measuring depth [T]: 50 mm / 1.97 in. - Form [F] Ø: 30 mm / 1.18 in.		<ul style="list-style-type: none"> › Dial gauge, dirt-resistant › Rectangular and rigid measuring bar › Rust protected measuring anvils › Parallelism and indicator position adjustable › Light metal frame › Scale calibration 1/10
4110054512	Micrometer 3009 d (medium) - Measuring range [B]: 0 - 30 mm / 0 - 1.18 in. - Measuring depth [T]: 275 mm / 10.83 in. - Form [F] Ø: 30 mm / 1.18 in.		
4110054513	Micrometer 3010 d (big) - Measuring range [B]: 0 - 30 mm / 0 - 1.18 in. - Measuring depth [T]: 600 mm / 23.6 in. - Form [F] Ø: 30 mm / 1.18 in.		




Measurement tools

Used to determine geometric and physical data

Art.-No.	Measurement tools																		
4110054514	<p>Shore hardness device and case</p> <p>- For the hardness determination on flat specimens with a thickness of 6 mm / 0.24 in. and a diameter of at least 35 mm / 1.38 in.</p>	 <p> <ul style="list-style-type: none"> › The entire chassis of HP is made of aluminum which provides light weight and durability. To avoid indenter traveling with friction, we adopt the technique by combining different sizes of balls in the bearing to help smooth the indenter traveling. › Round shaped device with antiglare scale. </p> <table border="1"> <thead> <tr> <th rowspan="2">Method</th> <th rowspan="2">Materials</th> <th rowspan="2">Standards</th> <th colspan="2">Min. thickness</th> <th rowspan="2">Indenter shape</th> </tr> <tr> <th>mm</th> <th>inch</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Shore A</td> <td rowspan="2">Soft rubber, elastomers, natural rubber products, neoprene, casting resin, polyester, soft PVC, leather, printing cylinder etc.</td> <td>DIN EN ISO 868</td> <td>4</td> <td>0.16</td> <td rowspan="2">  </td> </tr> <tr> <td>DIN ISO 7619, DIN 53505, ASTM D 2240, NFT 51-174, B5903 Part. A 26</td> <td>6</td> <td>0.24</td> </tr> </tbody> </table>	Method	Materials	Standards	Min. thickness		Indenter shape	mm	inch	Shore A	Soft rubber, elastomers, natural rubber products, neoprene, casting resin, polyester, soft PVC, leather, printing cylinder etc.	DIN EN ISO 868	4	0.16		DIN ISO 7619, DIN 53505, ASTM D 2240, NFT 51-174, B5903 Part. A 26	6	0.24
Method	Materials	Standards				Min. thickness			Indenter shape										
			mm	inch															
Shore A	Soft rubber, elastomers, natural rubber products, neoprene, casting resin, polyester, soft PVC, leather, printing cylinder etc.	DIN EN ISO 868	4	0.16															
		DIN ISO 7619, DIN 53505, ASTM D 2240, NFT 51-174, B5903 Part. A 26	6	0.24															
4110054516	<p>Digital-seconds-thermometer with immersion and penetration probe</p> <p>Digital-seconds-thermometer:</p> <p>- For NiCr-Ni (Typ K) immersion and penetration probe</p>	 <p> <ul style="list-style-type: none"> › NiCr-Ni (Typ K) › Measurement range: -50 ... +1150°C › Resolution: 1 °C </p>																	
4110054517	<p>Immersion and penetration probe:</p> <p>- Sensor length: 130 mm / 5.12 in.</p> <p>- Sensor Ø: 3 mm / 0.12 in.</p>	<p> <ul style="list-style-type: none"> › Typ K, GTF 900, NiCr-Ni (Typ K) › Measurement range: -65 ... +1000°C › For gases and liquids </p> <p>  Complete thermometer consists of both parts, digital-seconds thermometer and immersion and penetration probe. </p>																	






Cutting tools











For splicing, installing and repairing conveyor belts

Art.-No.	Cutting tools		
4110054600	Work scissor, solid metal - Total length: 300 mm / 11.8 in. (right-hander)		<ul style="list-style-type: none"> › Forged › Strong industrial form with grips and large finger holes › Screw pivot readjustable › Scissor blades glossy › Tapered to a point › Grip painted
4110054601	Work scissor, solid metal - Total length: 200 mm / 7.87 in. (left-hander)		
4110054635	Work scissor, solid metal - Total length: 250 mm / 9.8 in. (right-hander)		
4110054602	Cable cutter (C16) - Steel cable Ø: 16 mm / 0.63 in. - Length: 590 mm / 23.2 in. - Weight: 2300 g / 81.1 oz.		<ul style="list-style-type: none"> › Cable cutter for cutting the strongest of cables, metal rods and metal springs › Clean, precise cut without crushing the cable thanks to the triangular cutting system › Easy and durable cutting adjustment › Lightweight handles › Helpful lever effect › Comfortable plastic coating › Reliable: <ul style="list-style-type: none"> - Unbreakable hardened handles made of forged aluminium with a lifetime guarantee - Blades and fastenings in high-quality hardened steel - Parts subject to wear and tear can be replaced
4110054603	Cable cutter (C9) - Steel cable Ø: 9 mm / 0.35 in. - Length: 325 mm / 12.8 in. - Weight: 750 g / 26.5 oz.		
4110054604	Cable Cutter (C7) - Steel cable Ø: 7 mm / 0.28 in. - Length: 190 mm / 7.5 in. - Weight: 270 g / 9.5 oz.		<ul style="list-style-type: none"> › Cable cutter for cutting the strongest of cables › Gives a clean cut without squashing thanks to the triangular cutting system › Blades and centre bolt in high-quality hardened steel for exceptional performance › Thumb catch designed for one-handed operation › Pressed steel handles with non-slip grips
4110054605	Indescence cutter and spare blades - Grey, zinc		
4110054606	Hook blades - Hook blades for utility knife-SCHILLER - Thickness: 0.65 mm / 0.03 in. - PU: 10		<ul style="list-style-type: none"> › Chrome alloyed › Ice-hardened

Cutting tools

For splicing, installing and repairing conveyor belts

Art.-No.	Cutting tools	
4110054627	Extra heavy duty knife - Knife with a thick elastomer grip and a ROCK HARD-blade - Dial Blade Lock - Extra heavy duty 25 mm / 1 in.	 <ul style="list-style-type: none"> › Equipped 4 straight blades / 1 hook blade
4110054632	Extra heavy duty blades - PU: 10	 <ul style="list-style-type: none"> › Optimized blade geometry and cutting edge angles to ensure the best cutting performance for specific types of material
4110054607	Trapezoidal blade 1992 N - Thickness: 0.65 mm / 0.03 in. - PU: 100	 <ul style="list-style-type: none"> › Ideal for heavy cutting jobs, rubber and any other material requiring a stiffer and stronger blade
4110054608	TINA knife - Length: 190 mm / 7.48 in. - Blade: 24 mm / 0.94 in. wide, high-grade steel, adjustable, fully retractable	 <ul style="list-style-type: none"> › The blade is reliably sharp, so it rarely has to get sharpened › With Tina-knife work is easier, better and pleasanter › Moreover you can reach a higher efficiency, a temporization and less knife consumption › With wooden handle from the cherry tree
4110054609	Blade for Knife TINA - Width: 24 mm / 0.94 in. - Length: 190 mm / 7.48 in.	

Art.-No.	Cutting tools		
4110054612	Profi knives Profi-cutting knife (small): - Blade length: 150 mm / 5.91 in. - Colour: neon-yellow - Form: straight		› Profi knives (for absolute perfection in form and quality): The blades are made of stainless, special alloy molybdenum steel and polished to protect them from corrosion. The handles are made of high-quality, non-slip polyamide and guarantee effortless working and a maximum of safety. The blades carry a consecutive number to ensure traceability.
4110054613	Profi-cutting knife (big): - Blade length: 340 mm / 13.39 in. - Colour: neon-yellow - Form: straight		
4110054614	Profi-block knife: - Blade length: 210 mm / 8.27 in. - Colour: neon-yellow - Form: curved, rounded knife point	 	
4110054615	Manager knives Manager-cutting knife (small): - Blade length: 150 mm / 5.91 in. - Colour: neon-yellow - Form: straight		› Our semi-professional series for those looking for an affordable price as well as top quality. The blades are made of stainless steel and have a standard finish. The handles are made of polyamide. Knives are delivered with yellow handles. All the blades carry a consecutive number to ensure traceability.
4110054616	Manager-cutting knife (big): - Blade length: 260 mm / 10.24 in. - Colour: neon-yellow - Form: straight		
4110054617	Manager-block knife: - Blade length: 210 mm / 8.27 in. - Colour: neon-yellow - Form: curved, rounded knife point	 	
4110054618	Deburring knife Handle: - Security handle with wide gap (3 x 20 mm / 0.12 x 0.79 in.)		› For removing joints or edges of rubber which remain on Steelcords after stripping.
4110054619	Blade: - Deburring knife 175 x 12 x 2.8 mm / 6.89 x 0.47 x 0.11 in. - Steel (100 Cr 6)		

Cutting tools

For splicing, installing and repairing conveyor belts

Art.-No.	Cutting tools		
4110054620	Offset flexible knife: - Total length: 310 mm / 12.2 in.		<ul style="list-style-type: none"> › For cutting Rubber › Especially when flat surface is needed › Total length: 310 mm/ 12.2 in.
4110054621	Half moon knife		<ul style="list-style-type: none"> › For safety cutting of fabric by fabric belts
4110054630	Half moon knife (with slide shoe) - Length: 155 mm / 6.1 in. - Blade length: 38 mm / 1.5 in. - Radius: 23.5 mm / 0.93 in. - Weight: 68 g / 0.15 lbs		<ul style="list-style-type: none"> › Handy grip from impact-proof plastic, VDE-tested, blade from stainless steel, with protective cap › Good force transmission through thumb cavity and "finger hook" on grip end › Hook blade, sickle-shaped with slide shoe at tip, no damage of fabric
4110054622	Oscillating power tool "Fein SuperCut FSC 2,0 Q" Specifications: - Power consumption: 400 W - Power output: 220 W - Oscillations: 11,000 - 18,500 rpm - Cable with plug: 5 m / 16 ft. - Including: tool case	 	<ul style="list-style-type: none"> › The high-performance oscillating power tool with QuickIN › Highest quality and stability due to the use of ball and needle bearings together with a motor and gearbox designed for continuous use and heavy loads › Convenient, tool-free accessory change, using the QuickIN rapid change system › Hexagonal tool mount for outstanding torque transfer between tool and accessories › Powerful oscillating motion (2 x 2° range) for maximum work progress › Electronic speed control. › FEIN High-Power-Motor for outstanding performance
4110054623	Spare blades super cutter "Fein SuperCut FSC 2,0 Q" - Total length: 310 mm / 12.2 in. - PU: 2		<ul style="list-style-type: none"> › For separating cuts from inside and outside › The cutter blade edges are ground. For optimal cutting they should be sharpened with a whetstone.




Saw, drill and grinding technology

First-class accessories and electronic devices

Art.-No.	Saw, drill and grinding technology	
4110054704	Whetstone: - L x W: 150 x 50 mm / 5.9 x 1.97 in. - Thickness: 25 mm / 0.98 in. - Grain: rough/fine	 <ul style="list-style-type: none"> › Fast pre-grinding and finish honing of flat cutting edges is achieved by having different grains on each side › Silicon carbide
4110054743	Grinding disc - Dimension: 175 x 2 mm / 6.89 x 0.08 in. - Borehole: 22 mm / 0.87 in. - Grit size: 18	 <ul style="list-style-type: none"> › Tungsten carbide grinding tools, copper bonded, for buffing most non-metals materials like rubber, PU and wood. › Flat disc
4110054700	Buffing disc (grit size 36): - 180 x 22 mm / 7.09 x 0.87 in.	 <ul style="list-style-type: none"> › An alumina zirconia disc constructed on a fibre backing › For general use
4110054701	Buffing disc (grit size 60): - 180 x 22 mm / 7.09 x 0.87 in.	
4110054757	Buffing disc (grit size 80): - 180 x 22 mm / 7.09 x 0.87 in.	
4110054702	Support plate for fibre discs Support plate with cooling ribs - Glass fiber reinforced - Ø = 178 mm / 7.01 in.	 <ul style="list-style-type: none"> › Support plate for clamping fibre discs › For use of angle grinders with M14 holder
4110054744	Steel wire brush and grooved wire brush Steel wire brush: - Ø 100 x 30 mm / 3.94 x 1.18 in. - Borehole: Ø 16 mm / 0.63 in.	 <ul style="list-style-type: none"> › For buffing rubber-coated steel cables when splicing steelcord conveyor belts
4110054745	Grooved wire brush: - Ø 100 x 25 mm / 3.94 x 0.98 in. - Borehole: Ø 16 mm / 0.63 in.	
4110054747	Wire brush adapter: - Mounting arbor: Ø 16 mm / 0.63 in.	<ul style="list-style-type: none"> › For buffing rubber coated steel cables during preparation of belt splices

Saw, drill and grinding technology



First-class accessories and electronic devices


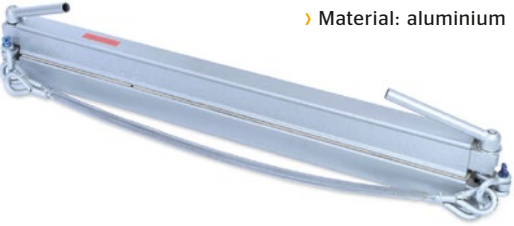
Art.-No.	Saw, drill and grinding technology	
4110054749	<p>Roughing machine 9237CB:</p> <p>Specifications:</p> <ul style="list-style-type: none"> - Continuous rating input: 1,200 W - No load speed: 0 - 3,200 rpm - Overall length: 470 mm / 18.5 in. - Width: 198 mm / 7.8 in. - Height: 187 mm / 7.36 in. - Max. capacities abrasive and wood: 180 mm / 7.09 in. - Spindle thread size: M14 x 2 - Weight: 3.4 kg / 7.5 lbs 	 <ul style="list-style-type: none"> › Electronic speed control maintains constant speed under load, critical for a professional finish › Perfect for clear coat finishes › Variable speed with preset stepped speed dial, ideal for ultra slow polishing › Hook and loop base for wool bonnet › D-handle for easy operation and control <p>Standard accessories:</p> <ul style="list-style-type: none"> › Loop handle › Polishing bonnet diameter: 180 mm / 7.09 in. › Sanding plate diameter: 165 mm / 6.5 in. › Centering sleeve 18 mm / 0.71 in. › Hex wrench 6 mm / 0.24 in.
4110054750	<p>Makita impact wrench TW0350J</p> <p>Specifications:</p> <ul style="list-style-type: none"> - Power input: 400 W - No-load speed: 2.000 min-1 - Idle speed: 2.000 min-1 - Torque-hard: 350 Nm - Tool holder: ½" - Standard screws: M12-M22 - Dimensions (L x W x H): 283 x 87 x 233 mm / 11.14 x 3.43 x 9.17 in. - Weight: 3.0 kg / 6.6 lbs 	 <ul style="list-style-type: none"> › Powerful professional impact wrenches with high-torque › Rocker switch for fast change between right and left run › Impact housing made of die-cast aluminum for the toughest demands › High quality bronze carbon brushes changeable from the outside
4110054736	<p>Quick change chuck:</p> <ul style="list-style-type: none"> - For Makita impact wrench TW0350J 	
4110054735	<p>Drill GBM 16-2 RE Professional</p> <p>Specifications:</p> <ul style="list-style-type: none"> - Rated power input: 1,050 W - No-load speed: 600 / 1,450 rpm - Power output: 570 W - Weight: 3.7 kg / 8.2 lbs - Rated speed: 380 / 880 rpm - Rated torque: 14.0 / 6.0 Nm - Drill spindle connecting thread: Kegel B 16 - Max. torque: 50.0 / 22.0 Nm <p>Drilling range:</p> <ul style="list-style-type: none"> - Drilling dia. in aluminium: 20/13 mm / 0.8/0.5 in. - Drilling dia. in wood: 40/20 mm / 1.6/0.8 in. - Drilling dia. in steel: 16/8 mm / 0.63/0.31 in. 	 <ul style="list-style-type: none"> › With spade handle for a firm grip › Control Electronic for exact pilot drilling › Forward/reverse rotation specially for loosening jammed formwork drill bits › Also suitable for stirring › Synchronised 2-speed draw key transmission; switchover possible during operation › Spindle collar diameter of 43 mm (European standard) - can be used in drill stands › Switch operated and locked with one finger › Long lifetime with roller bearingmounted motor and gears

Art.-No.		Saw, drill and grinding technology	
		Hollow drills / punches	
4110054706		Ø 6 mm / 0.24 in.	 <ul style="list-style-type: none"> › Punching holes approx. Ø 6 - 30 mm in conveyor belts and other rubber products. Maximum material thickness to be cut is 25 mm. <p>Handling:</p> <ul style="list-style-type: none"> › Best performance is achieved by means of a power punch with ½" square drive stud (Art.-No.: 4110054750) and a quick change chuck (Art.-No.: 4110054736). › To improve performance and down time, please use silicone spray. › Use soft base, e.g. soft wood plate, to cut holes thus avoiding damage of belt punch cutting edge. › Punching holes with belt punches of small diametres requires higher pressure for the first punches. When belt punches are warm, cut pressure can be reduced.
4110054708		Ø 8 mm / 0.31 in.	
4110054710		Ø 10 mm / 0.39 in.	
4110054712		Ø 12 mm / 0.47 in.	
4110054714		Ø 14 mm / 0.55 in.	
4110054716		Ø 16 mm / 0.63 in.	
4110054718		Ø 18 mm / 0.71 in.	
4110054720		Ø 20 mm / 0.79 in.	
4110054722		Ø 22 mm / 0.87 in.	
4110054724		Ø 24 mm / 0.94 in.	
4110054726		Ø 26 mm / 1.02 in.	
4110054728		Ø 28 mm / 1.10 in.	
4110054730		Ø 30 mm / 1.18 in.	
4110054740		Hollow drill set / Belt punch set - Inside diameter: 6 - 24 mm / 0.24 - 0.94 in.	
4110054751		Finger grinder 9032 Specifications: - Continuous rating input: 500 W - Overall length: 420 mm / 16.54 in. - Width: 158 mm / 6.22 in. - Height: 78 mm / 3.07 in. - Belt speed: 300 - 1,700 m/min / 980 - 5,600 ft./min. - Belt width: 9 mm / 0.35 in. - Belt length: 533 mm / 20.98 in. - Net weight: 1.6 kg / 3.5 lbs	 <ul style="list-style-type: none"> › Compact design for sanding in close quarters › Variable speed control dial (980-5,600 ft./min.) enable user to match the speed to the application › Adjustable sanding arm pivots 90° for hard-to reach areas › Easily adjustable belt tracking with a turn of a knob › Compact with less weight (3.5 lbs.) › 3 different size arm assemblies and belts available (1/4", 3/8", 1/2") for increased versatility › This sander connects to a dust collector for a cleaner workspace <p>Standard accessories:</p> <ul style="list-style-type: none"> › Sanding belt set 2 x K80 › Sanding arm 9 mm / 0.35 in.
4110054752		Grinding belt, aluminium oxide, endless - Dimensions: 9 x 533 mm / 0.35 x 20.98 in. - Grit: 60	  <ul style="list-style-type: none"> › For grinding applications on metal and wood with typical flat sanding and file belt machines › Version: aluminium oxide abrasive on strong cloth backing, resin bonded

Clamping technology



Proven clamping and holding devices



Art.-No.	Clamping technology		
4110054801	Vice grip Size 2 - Maximum tensile force of 8 kN		› Removal of rubber covers and fabric plies when splicing conveyor belts with fabric plies
4110054802	Vice grip Size 3 - Maximum tensile force of 30 kN		
4110054803	Machine hand vise size 1 (without loop)*: - Total length: 160 mm / 6.3 in. - Jaw width: 65 mm / 2.56 in. - Clamping width: 40 mm / 1.57 in.		› With hexagon nut and wrench, from drop forged C 35 steel, for the absolute highest loads, movable, easily exchangeable spindle with trapezoidal thread and washer, joint guide, undetachable round steel spreading spring, prismatic cutout in jaws for clamping round parts * With welded loop Please specify order number of desired machine hand vise + order number of eyelet (if you want to order machine hand vise incl. welded loop)
4110054804	Machine hand vise size 2 (without loop)*: - Total length: 200 mm / 7.87 in. - Jaw width: 80 mm / 3.15 in. - Clamping width: 50 mm / 1.97 in.		
4110054805	Machine hand vise size 3 (without loop)*: - Total length: 250 mm / 9.84 in. - Jaw width: 90 mm / 3.54 in. - Clamping width: 60 mm / 2.36 in.		
4110054848	Welded loop		

Art.-No.	Clamping technology	
4110054806	Rope clamp (load capacity 1700 kg) - Cable diameter: 5 - 12 mm / 0.2 - 0.47 in.	<ul style="list-style-type: none"> › Rope clamp for fixing steelcords during preparation of belt splices. › Coated with zinc › Grooved surface for holding steelcords, made of hardened steel
4110054814	Rope clamp (load capacity 3000 kg) - Cable diameter: 8 - 18 mm / 0.3 - 0.71 in.	
4110054807	Clamping device / belt end clamps EL 800 - Max. belt width: 800 mm / 2.6 ft.	<ul style="list-style-type: none"> › For tightening the belt ends › Light metal construction, with manual operation (max. 40 kN) › Clamping Range: 5 - 30 mm / 0.2 - 1.18 in. › Material: aluminium
4110054808	EL 1000 - Max. belt width: 1000 mm / 3.3 ft.	
4110054809	EL 1200 - Max. belt width: 1200 mm / 3.9 ft.	
4110054810	EL 1400 - Max. belt width: 1400 mm / 4.6 ft.	
4110054811	EL 1600 - Max. belt width: 1600 mm / 5.2 ft.	
4110054812	EL 1800 - Max. belt width: 1800 mm / 5.9 ft.	
4110054813	EL 2000 - Max. belt width: 2000 mm / 6.6 ft.	

Clamping technology

Proven clamping and holding devices

Art.-No.	Clamping technology	
4110054815	<p>Ratchet lever hoist UNOplus with round steel chain</p> <p>UNOplus 750</p> <ul style="list-style-type: none"> - Loading capacity: 750 kg / 1653.5 lbs. - Chain dimensions dxt: 6 x 18-T(8) mm / 0.24 x 0.71 in. - Hoisting power at rated load: 20 daN - Weight with normal lift: 7.2 kg / 15.9 lbs 	 <p>Version:</p> <ul style="list-style-type: none"> › Numbers of load falls: 1 › Normal lift height: 1.5 m / 4.9 ft. › Loading capacity: 750 - 6000 kg / 1653.5 - 13227.7 lbs. › A versatile hoist for lifting, pulling and rigging loads, distinguished by its very compact construction from steel plate. Its low own weight and the easy action chain release make the UNOplus a handy hoist with many flexible uses.
4110054816	<p>UNOplus 1500</p> <ul style="list-style-type: none"> - Loading capacity: 1500 kg / 3306.9 lbs. - Chain dimensions dxt: 8 x 24-T(8) mm / 0.31 x 0.95 in. - Hoisting power at rated load: 35 daN - Weight with normal lift: 12.5 kg / 27.6 lbs. 	<p>Quality features:</p> <ul style="list-style-type: none"> › The forged suspension and load hooks from ageing-resistant, high alloyed tempering steel open at overloads without breaking. › The standard galvanized high strength load chain corresponds to the currently applicable national and international standards. › Chain guide integrated into housing ensures flawless running of the load chain over the load chain sheave. › Robust chain end piece › Easy action chain release for quick load fastening › Hand lever with ergonomic rubber handgrip › Hard chrome plated handwheel
4110054817	<p>UNOplus 3000</p> <ul style="list-style-type: none"> - Loading capacity: 3000 kg / 6613.9 lbs - Chain dimensions dxt: 10 x 30-T(8) mm / 0.4 x 1.2 in. - Hoisting power at rated load: 40 daN - Weight with normal lift: 21,5 kg / 47.4 lbs. 	<p>› Load actuated brake with corrosion-protected components and asbestos-free friction discs</p> <p>› Robust bottom surface with encapsulated bolts</p> <p>› Lower exertion of force on hand lever due to optimum gear ratio</p>
4110054818	<p>UNOplus 6000</p> <ul style="list-style-type: none"> - Loading capacity: 6000 kg / 13227.7 lbs. - Chain dimensions dxt: 10 x 30-T(8) mm / 0.4 x 1.2 in. - Hoisting power at rated load: 40 daN - Weight with normal lift: 32 kg / 70.5 lbs. 	
4110054819	<p>Hand winch (Typ T 508 D):</p> <ul style="list-style-type: none"> - Rates capacity: 800 kg / 1763.7 lbs 	 <ul style="list-style-type: none"> › Specially designed for work where extra light tools are particularly important. › Indispensable aids in civil engineering and specialist construction, in transport company and salvage company, in assembly of all types, in fire service and emergency management
4110054820	<p>Hand winch (Typ T 516 D):</p> <ul style="list-style-type: none"> - Rates capacity: 1600 kg / 3527.4 lbs 	<ul style="list-style-type: none"> › The hand winch is durable and safe, easy to use, extremely compact and lightweight, effortless to transport and install. › The hand winch includes winch, handle and rope and reeler.



Art.-No.	Clamping technology		
4110054856 WARN Works PullzAll - Lifting and pulling tool, 230V Specifications: - Lifting / pulling capacity: 454 kg (1,000 lbs.) - Power: 1,200 W - Switch: Forward / reverse - Speed: variable - Load Limiter: Electronic, with LED - Brake: dynamic - Wire rope: 4.6 m x 5.5 mm / 177.17 x 0.22 in. - Weight: 6.8 kg (15 lbs.) - Dimension: 500 x 310 x 330 mm / 19.69 x 12.2 x 13 in.			<ul style="list-style-type: none"> When you're in the shop and have access to a power source, just plug in PullzAll and let it help you tackle those labor intensive chores. Move heavy machinery. Hoist an engine block. Lift a load precisely into place, then nail it, weld it, whatever it. You think up the task, and PullzAll flat out revolutionizes the amount of work one man can do.
4110054821 1000 kg / 2204 lbs (1 m): - 1 m circumferential length (violet)	Round slings		<ul style="list-style-type: none"> Durable sling with thick sleeve and woven loading capacity stripes for professional use.
4110054822 1000 kg / 2204 lbs (2 m): - 2 m circumferential length (violet)			Easy identification of the safe working load: <ul style="list-style-type: none"> Colour coded according to DIN-EN1492-2 Capacity stripes: each stripe is equal to 1 tonne capacity (WLL)
4110054823 1000 kg / 2204 lbs (3 m): - 3 m circumferential length (violet)			<ul style="list-style-type: none"> All slings have identification label sewn into sling
4110054824 2000 kg / 4409 lbs (2 m): - 2 m circumferential length (green)			
4110054825 2000 kg / 4409 lbs (3 m): - 3 m circumferential length (green)			
4110054826 2000 kg / 4409 lbs (4 m): - 4 m circumferential length (green)			
4110054827 3000 kg / 6614 lbs (3 m): - 3 m circumferential length (yellow)			
4110054828 3000 kg / 6614 lbs (4 m): - 4 m circumferential length (yellow)			
4110054829 3000 kg / 6614 lbs (5 m): - 5 m circumferential length (red)			

Loading capacities

Conventional hitching methods	Straight	Choke hitch	Basket hitch parallel	Basket hitch 45°	Basket hitch 45° - 60°	Till 45°	Above 45° till 60°
Colour	1.000	2.000	3.000	5.000			
1.000	1.000 kg	800 kg	2.000 kg	1.400 kg	1.000 kg	700 kg	500 kg
2.000	2.000 kg	1.600 kg	4.000 kg	2.800 kg	2.000 kg	1.400 kg	1.000 kg
3.000	3.000 kg	2.400 kg	6.000 kg	4.200 kg	3.000 kg	2.100 kg	1.500 kg
5.000	5.000 kg	4.000 kg	10.000 kg	7.000 kg	5.000 kg	3.500 kg	2.500 kg

Clamping technology

Proven clamping and holding devices

Art.-No.	Clamping technology	
4110054830	Clamping chain (total length: 1 m / 3.3 ft.)	
4110054840	Clamping chain (total length: 2 m / 6.6 ft.)	
4110054841	Clamping chain (total length: 3.5 m / 11.5 ft.) Please note: clamping chain is to use only in combination with chain hoists or similar fixtures!	 <p>Clamping chain consisting of:</p> <p>2 x round steel chain:</p> <ul style="list-style-type: none"> › DIN 5685 C100 zinc plated › Straight shape C › t = 66 mm / 2.6 in. › b = 40 mm / 1.58 in. › d = 10 mm / 0.4 in. <p>2 x L-section:</p> <ul style="list-style-type: none"> › L-section of flats 60 x 12 mm / 2.4 x 0.5 in. › With thread M10 and loop for shackle › Long side: bended › Short side: welded › Internal dimensions: 150 mm / 5.9 in. <p>4 x shackle:</p> <ul style="list-style-type: none"> › DIN 82101 › Zinc plated › Form: A › Working load limit: 1 t › b1: 21 mm / 0.8 in. › d4: 16 mm / 0.63 in. › h1: 49 mm / 1.93 in. <p>1 x turnbuckle:</p> <ul style="list-style-type: none"> › Stainless steel › Thread: M12 › L1: 168 mm / 6.6 in. › Loop: 18 mm / 0.71 in. › L2: 300 mm / 11.8 in. › Breaking load: 1200 kg / 2645 lbs 

Special tools



Unique purpose hand tools

Art.-No.	Special tools		
4110054901	Textil lever: - Total length: 27 cm / 10.63 in.		<ul style="list-style-type: none"> › For preparing fabric conveyor belt splices › Wooden handle
4110054902	Handheld rasp and replacement rasp Handheld rasp (complete)		<ul style="list-style-type: none"> › For buffing ends of conveyor belts during preparation of belt splices.
4110054903	Replacement rasp		
4110054904	Pricker: - 3 mm / 0.12 in. (pointy) - Length: 10 cm / 3.94 in.		<ul style="list-style-type: none"> › To remove bubbles in splices and repairs › To remove bubbles in doupled material
4110054906	Stitching roller, slim: - Diameter: 43 mm / 1.69 in. - Width: 27 mm / 1.06 in. - Ø above pins: 52 mm / 2.05 in. - No. of rows: 5		<ul style="list-style-type: none"> › Stitcher with buffing pins › Diameter: 43 mm › Width: 23 mm › Ø above pins: 52 mm › No. of rows: 5
4110054907	Stitching roller, wide: - Diameter: 43 mm / 1.69 in. - Width: 76 mm / 2.99 in. - Ø above pins: 52 mm / 2.05 in. - No. of rows: 11 + 12 interchanging		<ul style="list-style-type: none"> › Stitcher with buffing pins › Diameter: 43 mm › Width: 70 mm › Ø above pins: 52 mm › No. of rows: 11 + 12 interchanging
4110054908	Smooth cylindrical stitcher: - Diameter: 40 mm / 1.57 in. - Width: 46 mm / 1.81 in.		<ul style="list-style-type: none"> › For doubling different layers of Caoutchouc › For mounting CORREX Material › For Drum lagging › For applying rubber without air inclusions › For correctly applying CONREMA Material
4110054909	Serrated edge stitcher, slim: - Diameter: 40 mm / 1.57 in. - Width: 18 mm / 0.71 in.		<ul style="list-style-type: none"> › For doubling different layers of Caoutchouc › For mounting CORREX Material › For Drum lagging › For applying rubber without air inclusions › For correctly applying CONREMA Material
4110054910	Serrated edge stitcher, wide: - Diameter: 40 mm / 1.57 in. - Width: 76 mm / 2.99 in.		<ul style="list-style-type: none"> › For doubling different layers of Caoutchouc › For mounting CORREX Material › For Drum lagging › For applying rubber without air inclusions › For correctly applying CONREMA Material
4110054911	Pointed roller: - Diameter: 40 mm / 1.57 in. - Width: 2.5 mm / 0.1 in.		<ul style="list-style-type: none"> › For doubling different layers of Caoutchouc › For mounting CORREX Material › For Drum lagging › For applying rubber without air inclusions › For correctly applying CONREMA Material › Especially in joint and edge areas

Special tools



Unique purpose hand tools



Art.-No.	Special tools	
4110054917	Double acting roller For belt width up to 800 mm / 2.6 ft.	
4110054918	For belt width up to 1,200 mm / 3.9 ft.	
4110054919	For belt width up to 1,600 mm / 5.2 ft.	
4110054922	For belt width up to 2,000 mm / 6.6 ft.	
4110054913	Conrepu-machine Complete	
4110054914	Dispenser	
4110054915	Compressor	
4110054916	Manometer	
	<p>*Description:</p> <ul style="list-style-type: none"> - 2-component PU repair system in cartridges. (400 ml) <p>Application:</p> <ul style="list-style-type: none"> - Repair of top - or bottom cover of textile and steel-cord conveyor belts. - Repair of rubber- and PU lining material. <p>Hardness: 70 +/- 5 Shore A (DIN 53505)</p>	
	<p>Dispenser for 2-component adhesives:</p> <ul style="list-style-type: none"> › The dispenser has been developed for mixing and applying 2-component adhesives of various different formulas. › Cartridge: 400 ml* › Operating pressure: max. 6 bar › Compressed air supply: max. 8 bar › Air requirements: ISO 8573-1 2.4.2 › Pressure adjustment: Infinitely variable › Sound level: 83 dBA › Weight: 2.2 kg / 4.85 lbs. <p>Compressor cp 16:</p> <ul style="list-style-type: none"> › Max. operating pressure in bar: 8.9 › Max. working pressure in bar: 8.0 › Air displacement: 160 rpm › Motor in V/Hz: 230/50 › Input power in W: 1000 › Output power in W: 600 › Revolutions in rpm: 2300 › Sound level in db(A): 95 › Weight: 5.5 kg / 12.1 lbs. › l x w x h: 350 x 370 x 210 mm / 13.78 x 14.57 x 8.27 in. 	

Art.-No.	Special tools	
4110054925	Hand extruder - 1150 Watt, 220 V (50 Hz) or 110 V (50 Hz) - With 2 spanners SW24 - Weight: approx 7.5 kg / 16.5 lbs	 <ul style="list-style-type: none"> › Hand extruder for the maintenance, repair and splicing of steelcord conveyor belts
4110055233	Cleaning rubber for hand extruder - Thickness: 3 mm / 0.12 in. - Dimension (W x L): 18 x 3000 mm / 0.71 x 118.1 in.	<ul style="list-style-type: none"> › Cleaning rubber, approx. 1 kg / 2.2 lbs › Content: 5 rolls
	Hand extruder tie gum for belt splicing and belt repairs (on request)	<ul style="list-style-type: none"> › On request
4110054920	Cord Stripper Technical details: - Belt width up to 43 mm - Ø cable 3.7 - 12.5 mm - Cord width 10 - 25 mm - Cover plate thickness running side till 25 mm - Cover plate thickness carrying side till 12 mm - Dimension (L x W x H) 370 x 220 x 400 mm - Weight 12 kg - 1 Blade holder set Typ A + hold-down roll - 1 Blade holder set Typ B + hold-down roll - 1 Tool set	 <ul style="list-style-type: none"> › The Cord Stripper is a indispensable accessory to strip and separate the steel cable of conveyor belts.

Special tools

Unique purpose hand tools







Art.-No.	Special tools			
	Blades for Cord Stripper		<ul style="list-style-type: none"> › The minimum order quantity of each blade are 50 pieces (O = Top and U = Bottom). Blades are not part of the delivery of Cord Stripper and must be ordered separately. 	
	Blade holder A			
4110054930	Cable Ø: 3.7 - 4.1 mm		Blade no.: 4.5	
4110054931	Cable Ø: 4.2 - 4.6 mm		Blade no.: 5	
4110054932	Cable Ø: 4.7 - 5.1 mm		Blade no.: 5.5	
4110054933	Cable Ø: 5.2 - 5.6 mm		Blade no.: 6	
4110054934	Cable Ø: 5.7 - 6.1 mm		Blade no.: 6.5	
4110054935	Cable Ø: 6.2 - 6.6 mm		Blade no.: 7	
4110054936	Cable Ø: 6.7 - 7.1 mm		Blade no.: 7.5	
4110054937	Cable Ø: 7.2 - 7.6 mm		Blade no.: 8	
4110054938	Cable Ø: 7.7 - 8.1 mm		Blade no.: 8.5	
4110054939	Cable Ø: 8.2 - 8.6 mm		Blade no.: 9	
4110054940	Cable Ø: 8.7 - 9.1 mm		Blade no.: 9.5	
	Blade holder B			
4110054941	Cable Ø: 9.2 - 9.6 mm			Blade no.: 10
4110054942	Cable Ø: 9.7 - 10.1 mm		Blade no.: 10.5	
4110054943	Cable Ø: 10.2 - 10.6 mm		Blade no.: 11	
4110054944	Cable Ø: 10.7 - 11.1 mm		Blade no.: 11.5	
4110054945	Cable Ø: 11.2 - 11.6 mm		Blade no.: 12	
4110054946	Cable Ø: 11.7 - 12.1 mm		Blade no.: 12.5	
4110054947	Cable Ø: 12.2 - 12.6 mm		Blade no.: 13	
4110054921	Cord Stripper Power Winch CS Technical Details: <ul style="list-style-type: none"> - Rope made of steel 6 m - Remote Control 4 m - Power 2.20 kW, 400 V, 50/60 Hz, 3 Ph + PE* - Dimensions (L x H x W) 620 x 500 x 650 mm - Protection type IP 54 - Weight ca. 70 kg - Tensile speed: ca. 34 m/min. - Overload protection 		<ul style="list-style-type: none"> › The Power Winch CS is an indispensable part of the Cord Stripper System. It is specially designed for continuous use and is especially characterized by high tensile speed, the torque and the nearground cable conduit. In addition, the signal color contributes to work-place safety. The safe operation of the supply and return takes place (4m long) via the control panel with emergency stop switch. The electronic phase control ensures that the operation of supply and return is always consistent. <p>* Other voltages on request.</p>	

Art.-No.	Special tools	
4110054924	Cord Stripper Slide rail for Power Winch CS Technical Details: - Length 3.5 m - With fixing points for belt width up to 3,000 mm - Dimensions (L x W x H) 3,500 x 380 x 70 mm - Weight 60 kg	 <ul style="list-style-type: none"> › The slide rail is fixed transversely to the conveyor belt and is used to safely accommodate the Power Winch CS. By gently move the Power Winch within the Guide rail, the optimum position to the pulling direction is assured.
4110054965	Cord Stripper Order example	<p>To use the cable stripper system for the first time, you need the following components:</p> <ul style="list-style-type: none"> › Cord Stripper › Min. 50 x Blades (Top) for Cord Stripper › Min. 50 x Blades (Bottom) for Cord Stripper › Power Winch CS › Slide rail for Power Winch CS
4110054926	Regroover Technical Details: - 170 VA transformer with three-step switch - When pushed forward, regroover is automatically switched on - Easily changeable blades - Cutting head with clamping width from 2-28 mm - Blades clearly visible during cutting process - f = 50-60 Hz - Pn = 65 VA - m = 1.8 kg - 230V (115V on demand)	 <ul style="list-style-type: none"> › Restoring tread design after repair works › Tread development › Grooving of rubber sheets and conveyor belts › Profiling of friction linings and overlaps › Processing of: ABS, EPDM, EPS, PA, PE, PP, PS, PVC ...
4110054927	Regroover Blades Sharpe: wedge - Cutting width: 8-10 mm - Cutting depth: 14 mm	 <ul style="list-style-type: none"> › For usual tread designs › Packed 20 pieces each
4110054928	Sharpe: round - Cutting width: 10-14 mm - Cutting depth: 16 mm	
4110054929	Sharpe: V-sharped - Cutting width: 22-28 mm - Cutting depth: 16 mm	<p>Further blades on demand</p>

Special tools

Unique purpose hand tools

Art.-No.	Special tools		
4110054952	Electric Belt Cutter CT-170 - Thickness up to 25 mm / 0.98 in. - 580 W, 230 V, 50 Hz - Weight: 7 kg / 15.4 lbs		<ul style="list-style-type: none"> › Electrical Rubber Cutting Machine for cutting fabric belts, rubber and PU platens, Shore hardness 25 - 90 sh° A › Incl. 1x HSS-blades Ø 170 mm / 6.7 in.
4110054924	Accumulator Belt Cutter CT-170A - Thickness up to 25 mm / 0.98 in. - 18V, 3.0 Ah, 230V, 50 Hz - Weight: 8 kg / 17.6 lbs		<ul style="list-style-type: none"> › Electrical Rubber Cutting Machine for cutting fabric belts, rubber and PU platens, Shore hardness 25-90 sh° A › Cordless! › Incl. 1x HSS-blades Ø 170 mm / 6.7 in., 2x batteries, 1x charger
4110054958	Electric Belt Cutter CT-220 - Thickness up to 50 mm / 1.97 in. - 750 W, 230 V, 50 Hz - Weight: 13 kg / 28.7 lbs		<ul style="list-style-type: none"> › Electrical Rubber Cutting Machine for cutting fabric belts, rubber and PU platens, Shore hardness 25 - 90 sh° A › Incl. 1x HSS-blades Ø 220 mm / 8.66 in.
4110054954	Pneumatic Belt Cutter CT-170P Technical Details: - Weight: 7.7 kg / 17 lbs - Blade: HSS; dimensions 170 x 4 mm; hole 20 mm; wedge 6 mm - Blade phases: phase 35 mm, pre-phase 2 mm	<ul style="list-style-type: none"> › Pneumactical Rubber Cutting Machine for cutting conveyor belts; rubber plates & PU › Drill: composite › Housing: stainless steel › Max. working pressure: 6 Bar › Max. air consumption: 230 l/min › RPM nominal: 800 › Power: 0,37 kW 	
4110054955	Pneumatic Belt Cutter CT-225P Technical Details: Weight: 10.3 kg / 22.7 lbs - Blade: HSS; dimensions 225 x 6 mm; hole 25 mm; wedge 8 mm - Blade phases: phase 76 mm, pre-phase 2 mm	<ul style="list-style-type: none"> › CT-170P Cut depth: maximum 25 mm / 0.98 in. › CT-225P Cut depth: maximum 50 mm / 1.97 in.  <p style="text-align: center;"> ↑ CT-225P ↑ CT-170P </p>	

Art.-No.	Special tools		
4110054969	Steelcord Belt Cutter M 20 Technical data: - Belt thickness up to 20 mm - Ø Steelcord up to 7,5 mm (ST2500) - Manual drive	 <p>↑ M 20</p>	Steelcord Belt Cutter M 20 Carrying side max. 9 mm Running side max. 5 mm Weight: 45 kg Steelcord Belt Cutter E 20 Carrying side max. 9 mm Running side max. 5 mm Weight: 65 kg Steelcord Belt Cutter 40 Carrying side max. 19 mm Running side max. 10 mm Weight 165 kg
4110054967	Steelcord Belt Cutter E 20 Technical data: - Belt thickness up to 20 mm - Ø Steelcord up to 7,5 mm (ST2500) - Capacity 0,55 kW, 400 V, 50 Hz, 3 Ph* - Cutting speed 1,20 m/min	 <p>↑ E 20</p>	 <p>↑ 40</p> <ul style="list-style-type: none"> › Significant increase in occupational safety. › Safe and quick cutting/ separating of steelcord conveyor belts. › Portable device for easy and rapid use in the field. › Ergonomic working. › Available for different belt dimensions. › A guide rail is not required.
4110054968	Steelcord Belt Cutter 40 Technical data: - Belt thickness up to 40 mm - Ø Steelcord up to 11 mm (ST5400) - Capacity 1,10 kW, 400 V, 50 Hz, 3 Ph* - Emergency Stop - Cutting speed 1,10 m/min *other voltages on request		
4110054956	Spare knife for Belt cutter Diameter: 170 mm / 6.7 in.		
4110054959	Diameter: 220 mm / 8.66 in.		
4110054960	Diameter: 225 mm / 8.86 in.		
4110054957	Air conditioning set		<ul style="list-style-type: none"> › Filters dust and water from Air › Lubricates the belt cutter with oil
4110054970	"Piano wire" pulling device		<ul style="list-style-type: none"> › For hooking and pulling of "Piano wire" - Stripping wire
4110054971	"Piano wire" Stripping wire Diameter: 1.25 mm / 0.05 in.		<ul style="list-style-type: none"> › For removing of rubber from between the cables of a steelcord belt
4110054972	Diameter: 1.6 mm / 0.06 in.		<ul style="list-style-type: none"> › PU = 100 pcs.

Working safety





High-quality industrial safety products




Art.-No.	Working safety		
4110055005	Cut resistant gloves (Leather) - Abrasion resistance: Level 4 - Blade cut resistance: Level 5 - Tear resistance: Level 4 - Puncture resistance: Level 2 Size: 8 PU: 1 pair	 EN 388  4121	<ul style="list-style-type: none"> › "Medex Multiflex® 5-finger", with cow grain leather on the palm › Material/typ: mix of cut protective fibres/cow grain-leather › Length: 27 cm › Knitted, with cow grain leather on the palm › Cow grain leather for better grip and better protection from stabs; highest cut protection; best comfort
4110055006	Size: 9 PU: 1 pair		
4110055007	Size: 10 PU: 1 pair		
4110055008	Size: 11 PU: 1 pair		
4110055044	Cut resistant gloves "Continental" - Abrasion resistance: Level 4 - Blade cut resistance: Level 5 - Tear resistance: Level 4 - Puncture resistance: Level 2 Size: 8 PU: 1 pair	 EN 388  4121	<ul style="list-style-type: none"> › Seamless cut resistant knit gloves of 13 Gauge HPPE/Lycra › Micro-Nitrile FOAM-coating on the palm and the fingertips, breathable › With CONTINENTAL logo › CAT II, EN 388 -4542
4110055041	Size: 9 PU: 1 pair		
4110055042	Size: 10 PU: 1 pair		
4110055043	Size: 11 PU: 1 pair		
4110055025	uvex spectacles case	 uvex	<ul style="list-style-type: none"> › Hard shell case with modern design › Extremely robust construction protects from external impact › Soft interior › Belt buckle fastening › Practical snap hook › Specially designed for goggles with strong curvature

Art.-No.	Working safety		
4110055023	Safety glasses "uvex pheos" (clear lens) Continental branded	 	<ul style="list-style-type: none"> › Modern, fashionable safety spectacle design › Duo-spherical lens with uvex supravision lens coating technology › Rimless spectacles with wide field of vision › Permanent anti-fog on the inside › Extremely scratch-resistant on the outside › Completely metal-free › Colour: black/grey › Lens: colourless / UV 2C - 1.2 › With or without logo "Continental"
4110055030	Without logo		
4110055015	Reflective vest - Material: 100% Polyester		<ul style="list-style-type: none"> › Reflective vest for adults (one size) › Reflector stripes at the front side at the back › Practical hook and loop fastener › EN471 standard 1
4110054480	Osram lights Pocket light - Perfekt for inspections around conveyor belts. The magnet in the rotatable hook allows to set the light perfect for the inspection and can be easily mounted on steel structures.		<ul style="list-style-type: none"> › Pocket light with 280 lm and a spot light option with 70 lm.
4110054481	Inspection light for Engineers (IL108) - The big brother of the Pocket light for situations in which more light is needed. The magnet in the handle allows to easily mount the light to steel structures.		<ul style="list-style-type: none"> › The inspection light with 500 lm is bright enough to perform short maintenance work. <p>Both lights are wireless and have a operating time of more than 2.5 hrs.</p>
4110055022	Safety helmet - Material: HDPE - Size: adjustable 53 - 61 cm - Color: white		<ul style="list-style-type: none"> › Modern helmet with 5-rib design, with optimized 30 mm slots at the side for the attachment of face and ear protection and adjustable ventilation. › 4-point belt strap I/79 4-G › Approval: DIN EN 397

Merchandise

Practical, useful and trendy fashion items

Art.-No.	Merchandising products		
4110055101	Turbo Cap		<ul style="list-style-type: none"> › Top of bill and panel black, outer edge conti-yellow. › With button and sweat band black
4110055102	T-shirt - Material: 100 % cotton - Gram weight: 180 g/m ²		<ul style="list-style-type: none"> › Ring spun cotton › Tubular fabric version prevents twisting › Shoulder-to-shoulder neckband › Double seams on cuffs and waistband › 1 x 1 ribbed collar
4110055103	Size: S		
4110055104	Size: M		
4110055105	Size: L		
4110055106	Size: XL		
4110055107	Size: XXL		
4110055108	Polo Shirt - Colour: black		<ul style="list-style-type: none"> › Polo tipping › High-quality Piqué Polo Shirt
4110055109	Size: S		
4110055110	Size: M		
4110055111	Size: L		
4110055112	Size: XL		
4110055113	Size: XXL		
4110055114	Sweatshirt - Material: 80 % cotton, 20 % polyester - Gram weight: 280 g/m ²		<ul style="list-style-type: none"> › Combed, ring spun cotton › Set sleeves, modern-style straight cut › Hem and cuffs cut slightly wider › Slimmer shoulder area and sleeves › Neckband in fishbone look › Side seams for optimum fit
4110055115	Size: S		
4110055116	Size: M		
4110055117	Size: L		
4110055118	Size: XL		
4110055119	Size: XXL		

Art.-No.	Merchandising products			
4110055120	Soft shell jacket - Material: 95 % cotton, 5 % spandex - Gram weight: 330 g/m ²		<ul style="list-style-type: none"> › Trendy jacket made of soft shell material › 3-layer functional material with PU membrane › Windproof, breathable and waterproof (up to 5000 mm water column) › Seams not sealed › Microfleece inside, net lining at the front › 2 side pockets with zip › 1 vertical breast pocket with zip › Elastic drawstring with stoppers at the hem › Refined look with zip at the front 	
4110055121	Size: S			
4110055122	Size: M			
4110055123	Size: L			
4110055124	Size: XL			
4110055125	Winter hat "Continental" - Colour: black with black brim		<ul style="list-style-type: none"> › Fleecy soft and pleasantly warm › High-quality double-knitted quality › Stylish and subtle emblem embroidered on rim › One size fits all › Washable at 40 degree celsius 	
4110055130	Maximo electric lighter		<ul style="list-style-type: none"> › Maximo electric lighter with child safety device GS-proved, black › Incl. 2-colour printing 	

Tool kit

for steelcord belt splicing

Art.-No.

4110055440

**Tool kit
for steelcord belt splicing**


› The Continental tool kit for steelcord belt splicings contains a basic range of tools that are essential for professional belt splices. We can also help you to decide which consumables, e.g. blades and sanding disks, you need for your own particular applications.

Content

				Page	PU	Number					Page	PU	Number	
General tools							Saw, drill and grinding technology							
4110054402	Locksmith's hammer with Ultratec handle	34	1	1	4110054704	Whetstone	45	1	1	4110054700	Buffing disc, grit size 36	45	1	25
4110054404	Water pump pliers	34	1	2	4110054701	Buffing disc, grit size 60	45	1	2	4110054702	Support plate with cooling ribs	45	1	1
4110054405	Special prinders	34	1	1	4110054744	Steel wire brush	45	1	1	4110054745	Grooved wire brush	45	1	1
4110054406	Workshop screwdriver	34	1	2	4110054747	Adapter (Ø = 16 mm)	45	1	1	4110054749	Roughing machine 9237CB	46	1	1
4110054408	Allen wrench set / nickel plated	34	1	1	Clamping technology									
4110054409	Combination spanner set	35	1	1	4110054801	Vice grip (size 2)	48	1	1	4110054804	Machine hand vise (size 2)	48	1	1
4110054412	All-steel screw clamp	35	1	6	4110054848	Welded loop	48	1	1	4110054806	Robe clamp	49	1	1
4110054415	Round brush (size 12)	35	1	4	4110054815	Ratchet lever hoist UNOplus (size 1)	50	1	2	4110054820	Hand winch 1.6 t	50	1	1
4110054416	Hand broom	35	1	2	4110054824	Round sling (2000 kg/2 m)	51	1	2	4110054830	Clamping chain (depending on belt width)	52	1	2
4110054417	Whetstone	35	1	2	Special tools									
4110054418	Cable drum	35	1	1	4110054902	Handheld rasp (complete)	53	1	1	4110054903	Handheld rasp (replacement)	53	1	1
4110054419	Extension cable	36	1	2	4110054904	Pricker	53	1	2	4110054906	Stitching roller (slim)	53	1	1
4110054420	Makita UB 1103 electronic blower / vacuum	36	1	1	4110054907	Stitching roller (wide)	53	1	1	4110054911	Pointed stitcher	53	1	1
4110054422	Silver refills	36	1	10	Working safety									
4110054423	Pen white	36	12	1	4110055006	Leather gloves (9)	60	1	2	4110055041	Cut resistant gloves "Continental" (9)	60	1	1
4110054424	Tool bag	37	1	1	4110055023	Safety glasses "uvex pheos" (clear lens)	61	1	2					
4110054425	Tool case 120.03/P	37	1	1										
Measurement tools														
4110054501	Folding rule, wood	38	1	2										
4110054502	Pocket measuring tape, extra stable	38	1	1										
4110054507	Chalk line reel 1 x 30 metre	38	1	2										
4110054509	Chalk line powder, blue, 100 g	39	1	1										
4110054510	Carpenter's square	39	1	1										
4110054511	Micrometer (small)	39	1	1										
4110054514	Shore hardness device and case	40	1	1										
Cutting tools														
4110054600	Work scissor, 300 mm	41	1	1										
4110054635	Work scissor, 250 mm	41	1	1										
4110054603	Cable cutter (medium)	41	1	1										
4110054605	Indescence cutter and spare blades	41	1	2										
4110054607	Trapezoidal blade 1992 N	42	100	1										
4110054608	TINA knife	42	1	2										
4110054609	Blade for TINA knife	42	1	12										
4110054618	Deburring knife (Handle)	43	1	1										
4110054619	Deburring knife (knife)	43	1	1										
4110054620	Offset flexible knife	44	1	1										

Tool kit

for fabric belt splicing

Art.-No.

4110055441


**Tool kit
for fabric belt splicing**


› The Continental tool kit for fabric belt splicings contains a basic range of tools that are essential for professional belt splices. We can also help you to decide which consumables, e.g. blades and sanding disks, you need for your own particular applications.

Content

				Page	PU	Number					Page	PU	Number	
General tools							Saw, drill and grinding technology							
4110054402	Locksmith's hammer with Ultratec handle	34	1	1	4110054704	Whetstone	45	1	1	4110054704	Grinding disc	45	1	1
4110054404	Water pump pliers	34	1	2	4110054700	Buffing disc, grit size 36	45	1	25	4110054701	Buffing disc, grit size 60	45	1	2
4110054405	Special pricers	34	1	1	4110054702	Support plate with cooling ribs	45	1	1	4110054744	Steel wire brush	45	1	1
4110054406	Workshop screwdriver	34	1	2	4110054747	Adapter (Ø = 16 mm)	45	1	1	4110054749	Roughing machine 9237CB	46	1	1
4110054408	Allen wrench set / nickel plated	34	1	1	Clamping technology									
4110054409	Combination spanner set	35	1	1	4110054801	Vice grip (size 2)	48	1	1	4110054804	Machine hand vise (size 2)	48	1	1
4110054412	All-steel screw clamp	35	1	6	4110054848	Welded loop	48	1	1	4110054815	Ratchet lever hoist UNOplus (size 1)	50	1	2
4110054415	Round brush (size 12)	35	1	4	4110054820	Hand winch 1.6 t	50	1	1	4110054824	Round sling (2000 kg/2 m)	51	1	2
4110054416	Hand broom	35	1	2	4110054830	Clamping chain (depending on belt width)	52	1	2					
4110054417	Whetstone	35	1	2	Special tools									
4110054418	Cable drum	35	1	1	4110054901	Textil lever	53	1	1	4110054902	Handheld rasp (complete)	53	1	1
4110054419	Extension cable	36	1	2	4110054903	Handheld rasp (replacement)	53	1	1	4110054904	Pricker	53	1	2
4110054420	Makita UB 1103 electronic blower / vacuum	36	1	1	4110054906	Stitching roller (slim)	53	1	1	4110054907	Stitching roller (wide)	53	1	1
4110054422	Silver refills	36	1	10	4110054911	Pointed stitcher	53	1	1	Working safety				
4110054423	Pen white	36	12	1	4110055006	Leather gloves (9)	60	1	2	4110055041	Cut resistant gloves "Continental" (9)	60	1	1
4110054424	Tool bag	37	1	1	4110055023	Safety glasses "uvex pheos" (clear lens)	61	1	2					
4110054425	Tool case 120.03/P	37	1	1	Measurement tools									
4110054501	Folding rule, wood	38	1	2	4110054501	Folding rule, wood	38	1	2	4110054502	Pocket measuring tape, extra stable	38	1	1
4110054502	Pocket measuring tape, extra stable	38	1	1	4110054507	Chalk line reel 1 x 30 metre	38	1	2	4110054509	Chalk line powder, blue, 100 g	39	1	1
4110054507	Chalk line reel 1 x 30 metre	38	1	2	4110054510	Carpenter's square	39	1	1	4110054511	Micrometer (small)	39	1	1
4110054509	Chalk line powder, blue, 100 g	39	1	1	4110054514	Shore hardness device and case	40	1	1	Cutting tools				
4110054510	Carpenter's square	39	1	1	4110054600	Work scissor, 300 mm	41	1	1	4110054635	Work scissor, 250 mm	41	1	1
4110054511	Micrometer (small)	39	1	1	4110054605	Indescence cutter and spare blades	41	1	2	4110054607	Trapezoidal blade 1992 N	42	100	1
4110054514	Shore hardness device and case	40	1	1	4110054608	TINA knife	42	1	2	4110054609	Blade for TINA knife	42	1	12
										4110054615	Manager-cutting knife (small)	43	1	1
										4110054618	Deburring knife (Handle)	43	1	1
										4110054619	Deburring knife (knife)	43	1	1
										4110054620	Offset flexible knife	44	1	1
										4110054621	Half moon knife (wooden handle)	44	1	1

Tool kit for pulley lagging


Art.-No.			
4110055442	Tool kit for pulley lagging		<p>› The Continental tool kit contains all tools which are essential for pulley lagging. It includes both, tools for preparing the pulley surface and tools for lagging the pulley.</p>

Content

				Page	PU	Number					Page	PU	Number	
General tools							Saw, drill and grinding technology							
4110054403	Hammer	34	1	1	4110054700	Buffing disc, grit size 36	45	1	5	4110054702	Support plate with cooling ribs	45	1	1
4110054405	Special pricers	34	1	1	4110054749	Roughing machine 9237CB	46	1	1	Special tools				
4110054426	Round brush (size 14)	35	1	2	4110054911	Pointed stitcher	53	1	1					
4110054471	"Pentel" pen	36	1	1										
4110054442	Tool bag FACOM	37	1	1										
Measurement tools														
4110054510	Carpenter's square	39	1	1										
Cutting tools														
4110054605	Indescence cutter and spare blades	41	1	1										
4110054620	Offset flexible knife	44	1	1										

Tool kit

Hand tools vulcanization

Art.-No.	
4110055441	<p>Tool kit “hand tools vulcanization“</p>  <p>› The Continental tool kit “hand tools vulcanization” contains a basic range of hand tools and consumables which are needed for fabric and steelcord belt splices.</p>

Content

		Page	PU	Number		Page	PU	Number
General tools					Saw, drill and grinding technology			
4110054401	Locksmith's hammer	34	1	1	4110054704	Whetstone	45	1 1
4110054404	Water pump pliers	34	1	2				
4110054405	Special princers	34	1	1	Special tools			
4110054406	Workshop screwdriver	34	1	2	4110054901	Textil lever	53	1 1
4110054408	Allen wrench set / nickel plated	34	1	1	4110054902	Handheld rasp (complete)	53	1 1
4110054409	Combination spanner set	35	1	1	4110054903	Handheld rasp (replacement)	53	1 1
4110054415	Round brush (size 12)	35	1	2	4110054904	Pricker	53	1 2
4110054416	Hand broom	35	1	2	4110054906	Stitching roller (slim)	53	1 1
4110054417	Whetstone	35	1	2	4110054907	Stitching roller (wide)	53	1 1
4110054422	Silver refills	36	1	1	4110054908	Smooth cylindrical stitcher	53	1 1
4110054471	„Pentel“ pen	36	1	1	4110054911	Pointed stitcher	53	1 1
4110054423	Pen white	36	12	1				
4110054424	Tool bag	37	1	1	Working safety			
4110054442	Tool bag FACOM	37	1	1	4110055041	Cut resistant gloves “Continental” (9)	60	1 1
					4110055042	Cut resistant gloves “Continental” (10)	60	1 1
Measurement tools					4110055025	Uvex spectacles case	60	1 1
4110054501	Folding rule, wood	38	1	1	4110055023	Safety glasses “uvex pheos” (clear lens)	61	1 1
4110054502	Pocket measuring tape, extra stable	38	1	1				
4110054506	Plumb lines	38	1	1				
4110054507	Chalk line reel 1 x 30 metre	38	1	1				
4110054523	Chalk line powder (yellow)	39	1	1				
4110054510	Carpenter's square	39	1	1				
4110054511	Micrometer (small)	39	1	1				
4110054514	Shore hardness device and case	40	1	1				
Cutting tools								
4110054600	Work scissor, 300 mm	41	1	1				
4110054635	Work scissor, 250 mm	41	1	1				
4110054603	Cable cutter (medium)	41	1	1				
4110054605	Indescence cutter and spare blades	41	1	2				
4110054627	Extra heavy duty knife	42	1	1				
4110054632	Extra heavy duty blades	42	10	1				
4110054607	Trapezoidal blade 1992 N	42	100	1				
4110054608	TINA knife	42	1	1				
4110054609	Blade for TINA knife	42	1	12				
4110054615	Manager-cutting knife (small)	43	1	1				
4110054618	Deburring knife (Handle)	43	1	1				
4110054619	Deburring knife (knife)	43	1	1				
4110054620	Offset flexible knife	44	1	1				
4110054621	Half moon knife (wooden handle)	44	1	1				

Construction site equipment to install or remove conveyor belts

Continental winding machine



- › Our winding machines are designed for conveyor belts with an overall weight of up to 60 t and a width of up to 2.400 mm. To ensure sufficient power at all times, high grade drives are used, which can generate a torque of up to 50.000 Nm at the winding axis. The relatively simple construction ensures that the belt can be changed without the need of specialized equipment. The machines are therefore perfect for operation on construction site.
- › If necessary, the winding machines can be provided with extra equipment, like guide rollers, fitting the application.

Continental vulcanizing presses

- › We gladly provide customized vulcanizing presses according to your needs and requirements.
- › We will be happy to provide a quotation without obligation as well as advice on all aspects of our products.



Technical questionnaire for vulcanizing presses

Please fill out this questionnaire as completely as possible:

1. Contact Information

Contact person

Company

Street & No.


Zip code & city

Country

Phone

e-mail

Relevant dimensions to define the size of a heating platen:

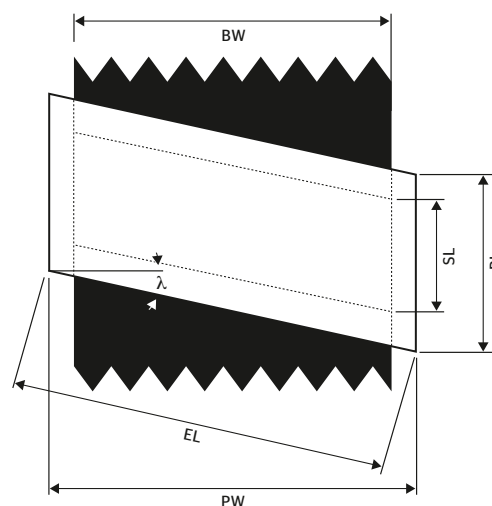

λ = Angle 16°42' PL = Plate length
 BW = Belt width SL = Splice length
 PW = Plate width EL = Edge length

2. Belt type

Steelcord belt Fabric conveyor belt

3. Place of operation

Underground Above ground

Country of use: _____

4. Type of splice

rhombic 16° 42' rhombic 22° rectangular 90°

5. Belt width in mm


6. Splice length in mm

7. Belt construction (e.g. EP250/4 / ST10000)

8. Power supply (e.g. 400 V 3-Ph+Pe+N, 50 C/S)

Service locations

worldwide

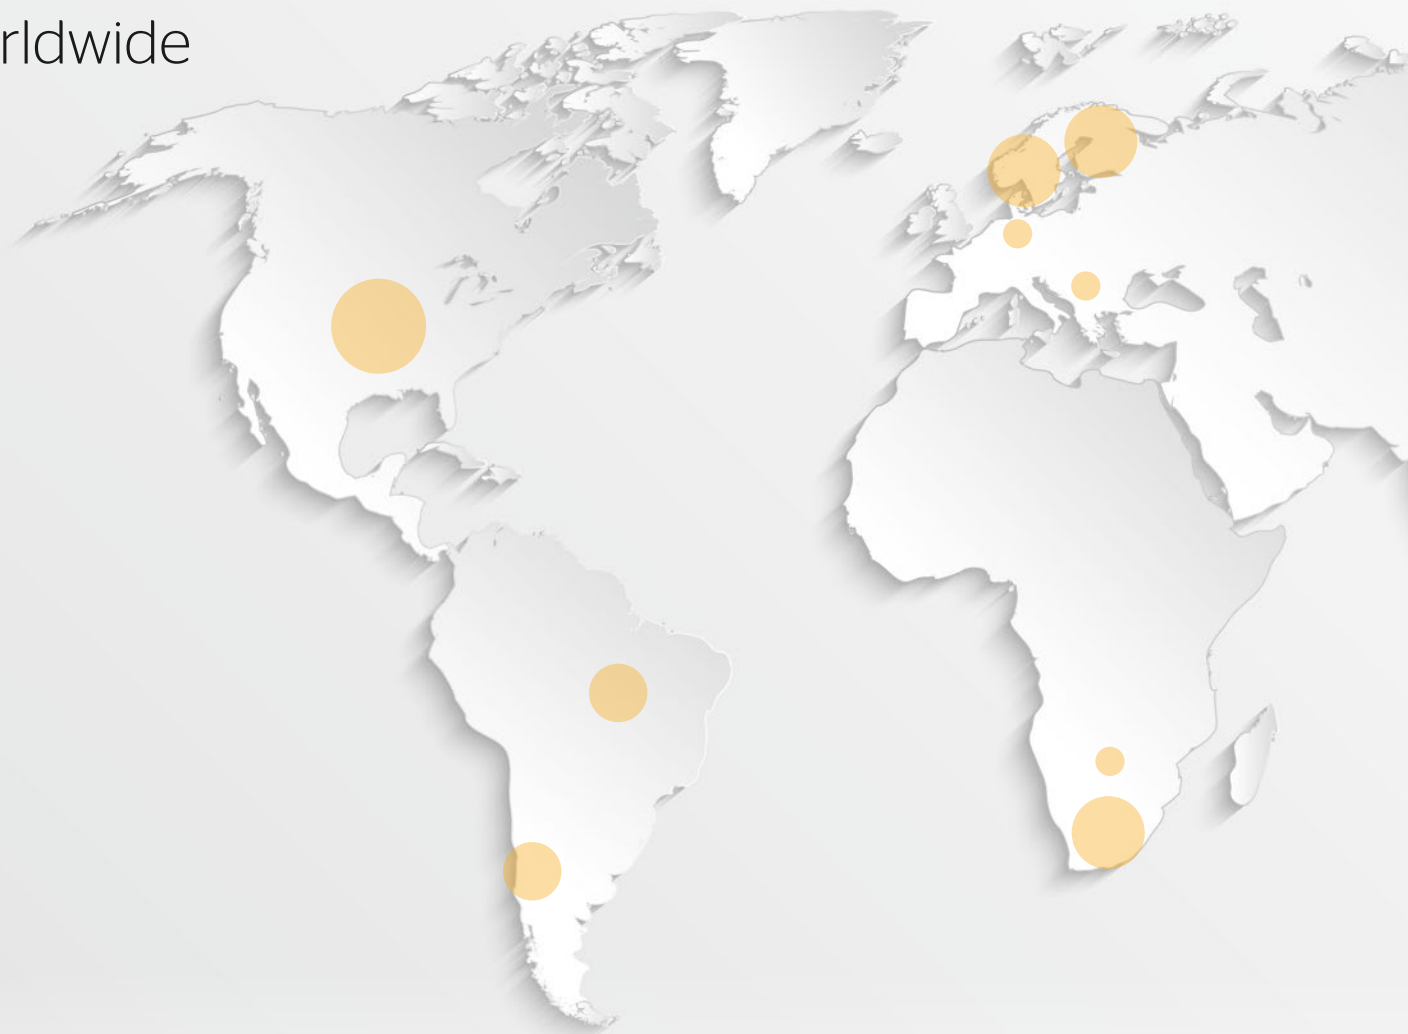

USA

- › 2240 Railroad Avenue
Grand Junction, CO 81505
Phone +1-435-613-1024
- › 123 Peninsula Street
Wheeling, WV 26003
Phone +1-330-607-4606
- › 1471 Garman Court
Gillette, WY 82716
Phone +1-307-682-7855
- › 12798 N. Blackhawk Lane
Mt. Vernon, IL 62864
Phone +1-618-242-1002
- › 608 Riverside Parkway
Austell, GA 30168
Phone +1-770-745-1034
- › 917 Industrial Park Circle
Bessemer, AL 35022
Phone +1-205-426-3754
- › 3375 S. Winchester Road
Apache Junction, AZ 85119
Phone +1-330-690-3172
- › 347 Gratton Road
Tazewell, VA 24651
Phone +1-276-988-9641

- › 1375A Holden Road
Logan, Cora, WV 25614
Phone +1-304-239-2590
- › 1458 Reunion Road
Charleston Elkview, WV 25071
Phone +1-304-965-9055

Brazil

- › **Belo Horizonte (Main Office)**
Av. Barão Homem de Melo, 4494
Estoril - Belo Horizonte - MG
30494-270
Phone +55 31 31942300
- › **Ouro Preto**
Polo Industrial de Antônio Pereira, 10
Distrito de Antônio Pereira -
Ouro Preto - MG 35400-000
Phone +55 31 35538333

Chile

- › Av. Francisco Martinic Nro. 345
Barrio Industrial - Puerto Seco,
Calama
Phone +56 965091555
- › Camino Lo Ruiz 4470
Santiago
Phone +56 991299459

Germany

- › Von-Menzel-Straße
37154 **Northeim**
Phone +49 5551 7020

Serbia (Kolubara)

- › Kosmajska bb
11563 **Veliki Crljeni**
Phone +381 117856531
+381 117856515

Sweden

- › **ContiTech Scandinavia AB**
Head Office
Finlandsgatan 18
164 74 **Kista**
Phone +46 (0)8 444 13 30
- › Service Branch Gällivare
Vuoskojärvivägen 19
982 38 **Vuoskonjärvivägen**
Phone +46 (0) 97 016 900
- › Service Branch Kiruna
Kirunavaaravägen 1
98 186 **Kiruna**
Phone +46 (0) 98 061 860
- › Service Branch Mora
Brudtallsvägen 14
792 32 **Mora**
Phone +46 (0) 54 86 08 10
- › Service Branch Karlstad
Blekegatan 8
652 21 **Karlstad**
Phone +46 (0) 54 86 08 10
- › Service Branch Örebro
Skomaskinsgatan 6
702 27 **Örebro**
Phone +46 (0) 19 277 14 31
- › Service Branch Stockholm
Jägerhornsväg 6
14175 **Kungens Kurva**
Phone +46 (0) 54 86 08 10
- › Service Branch Växjö
Bävervägen 5
352 45 **Växjö**
Phone +46 (0) 47 074 29 33



Finland

- › ContiTech Finland Oy - Oulu
Höyläämötie 2
90820 **Kello**
Phone +358 (0)207 217 332
- › ContiTech Finland Oy - Sotkamo
Malmitie 66
88120 **Tuhkakylä**
Phone +358 (0)207 217 330
- › ContiTech Finland Oy - Pirkkala
Ruutanakorventie 4
33960 **Pirkkala**
Phone +358 (0)207 217 211
- › ContiTech Finland Oy - Harjavalta
Lyytikänkatu 25
29200 **Harjavalta**
Phone +358 (0)207 217 211
- › ContiTech Finland Oy - Kouvola
Reijulankatu 12
45130 **Kouvola**
Phone +358 (0)207 217 350
- › ContiTech Finland Oy - Pieksämäki
Helmintie 2
76150 **Pieksämäki**
Phone +358 (0)207 217 367
- › ContiTech Finland Oy - Seinäjoki
Tuottajantie 59
60100 **Seinäjoki**
Phone +358 (0)207 217 380

South Africa

- › 27 Waterval Avenue
Rustenburg, 0299 ZA
Phone +27 (0)66 307 0277
- › Unit 20, 8 Reed Place
Maxmead, **Pinetown, 3610 ZA**
Phone +27 (0)31 701 7078
- › 19B Van Rensburg Street
Klipfontein, **Witbank, 1035 ZA**
Phone +27 (0)13 697 3805
- › 12 Bell Street
Secunda, 2302 ZA
Phone +27 (0)17 631 3540
- › 9 Mangaan Street
Kathu, 8446 ZA
Phone +27 (0)53 723 1033
- › Grootegeeluk Mine,
Nelson Mandela Drive
Lephalale, 0555 **Ellisras, ZA**
Phone +27 (0)82 322 4990

Botswana

- › Lot 4897, Makgadikgadi
Street, Lite Industrial Site
Francistown, BWP, Botswana
Phone +267 (0)241 7278

India

- › P.O. Muragacha Road
Gayeshpur, **Kalyani**
District: Nadia,
West Bengal: 741234
Phone +91 33 66327878,
+91 9748960520

Australia

- › 40 Exploration Drive
Gap Ridge, **Karratha, WA 6714**
Phone +61 8 9186 0500
- › 45 Gateway Drive
Paget **Mackay, QLD 4740**
Phone +61 7 4841 9800
- › 14 Energy Street
Malaga, WA 6090
Phone +61 8 6240 3500
- › 10/19 Balook Drive
Beresfield, NSW 2322
Phone +61 2 4966 3493

China

- › Building 1, No. 1333 Xinda
Road, Qingpu Industrial Park,
201700 **Shanghai, PR, China**
Phone +86 21 6921 4910





ContiTech Deutschland GmbH

30173 Hannover, Germany
www.continental-industry.com

Please contact us:

[www.continental-industry.com/
contact-forms/general-contact-form](http://www.continental-industry.com/contact-forms/general-contact-form)



Catalogue version 2024/1

Legal notice

The content of this publication is not legally binding and is provided as information only.

The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH. All rights reserved.

For complete information go to:
www.continental-industry.com/discl_en