

Rollin UV-E

Commercial Sheetfed

Rollin UV-E




Main Application
Commercial Sheetfed

Rollin UV-E is available in
3ply, 1,71 - 1,96 mm thickness

Advantages of the product

- › Specifically designed for UV inks
- › High versatility for different applications
- › Top face formulation less sensitive to image retention
- › Sticky back version available in formats for business forms and labels printing

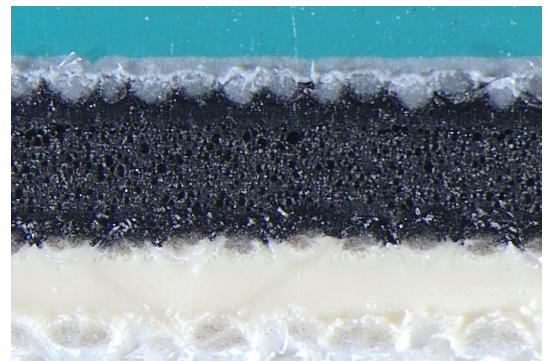


Guiding Value

Standard

Color:	Green	
Structure:	3 ply	
Surface Roughness Ra*:	0,8 micron	IO LAB TEC 060 - E (internal)
Compressibility @ 0,23 mm*:	2,6 MPa	IO LAB TEC 060 - B (internal)
Thickness +/-0,02 mm*:	1,71 - 1,96 mm	IO LAB TEC 060 - C (internal)

* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.

 **Continental Coated Systems Italy S.p.A**
Strada Provinciale 140,
26855 Lodi Vecchio, Italy
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: www.continental-industry.com/disc_en