

**Continental**   
The Future in Motion

**Sava** 

**Sava Strip 4 Dual**  
Coating

# Sava Strip 4 Dual




**Main Application**  
Coating

**Sava Strip 4 Dual is available in**  
**1,15 - 1,35 - 1,95 mm thickness**

## Advantages of the product

- › Rubber coating plate suitable for Aqueous/UV varnishing
- › Excellent dimensional stability thanks to the polyester carrier
- › Easy to strip from polyester base
- › Usable in both directions thanks to its fabricless design

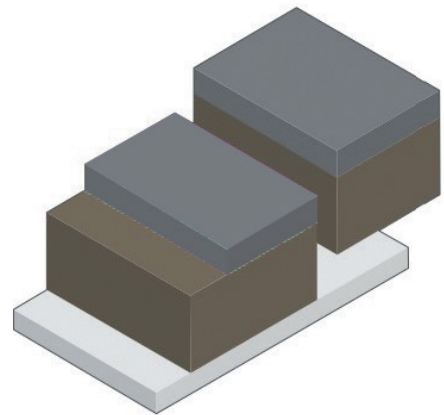

## Guiding Value

### Standard

<b>Color:</b>	Grey	
<b>Structure:</b>	Fabricless	
<b>Surface Roughness Ra*:</b>	0,6 micron	ISO 4287
<b>Compressibility @ 0,17 mm*:</b>	N/A	PT-300-WI-307 (internal)
<b>Thickness +/-0,02 mm*:</b>	1,15 - 1,35 - 1,95 mm	ISO 12636
<b>Cutting depth*:</b>	0,8 - 1,0 - 1,0 mm	ISO 12636

\* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



**Continental Printing Solutions Kranj d.o.o.**  
Škofjeloška cesta 6,  
4000 Kranj, Slovenia  
[www.continental-industry.com/printing-technology](http://www.continental-industry.com/printing-technology)

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: [www.continental-industry.com/disc\\_en](http://www.continental-industry.com/disc_en)