

## **Vulcan Cord**

Commercial Sheetfed / Packaging

# Vulcan Cord




## Main Application

Commercial Sheetfed / Packaging

### Advantages of the product

- › Suitable for conventional inks
- › Cord carcass offers excellent smash resistance, rapid recovery and dimensional stability
- › High edge marking resistance

**Vulcan Cord is available in 3ply, 1,95 mm thickness**

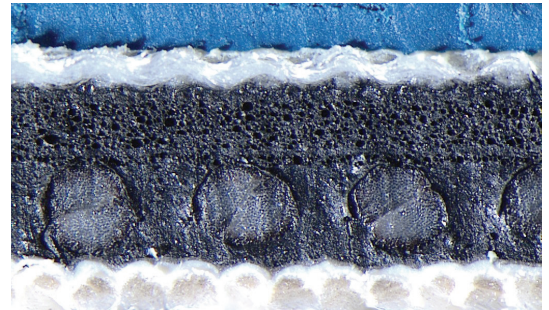

### Guiding Value

		Standard
<b>Color:</b>	Blue	
<b>Structure:</b>	3 ply	
<b>Surface Roughness Ra*:</b>	0,7 micron	IO LAB TEC 060 - E (internal)
<b>Compressibility @ 0,23mm*:</b>	2,6 MPa	IO LAB TEC 060 - B (internal)
<b>Thickness +/- 0,02 mm*:</b>	1,95 mm	IO LAB TEC 060 - C (internal)

\* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



**Continental Coated Systems Italy S.p.A**  
 Strada Provinciale 140,  
 26855 Lodi Vecchio, Italy  
[www.continental-industry.com/Offsetdrucktücher](http://www.continental-industry.com/Offsetdrucktücher)

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech AG, Hanover. All rights reserved. For complete information go to: [www.continental-industry.com/disci\\_en](http://www.continental-industry.com/disci_en)

Der Inhalt dieser Druckschrift ist unverbindlich und dient ausschließlich Informationszwecken. Für weitere Informationen besuchen Sie bitte: [www.continental-industry.com/disci\\_de](http://www.continental-industry.com/disci_de)