

**Continental**   
The Future in Motion

**Sava** 

**Sava Advantage Dual**  
Packaging

# Sava Advantage Dual




**Main Application**  
Packaging

**Sava Advantage Dual is available in 3ply, 1,95 mm thickness**

## Advantages of the product

- › Top surface for hybrid applications
- › Cord carcass offers excellent smash resistance and rapid recovery
- › Optimal ink transfer
- › High edge marking resistance

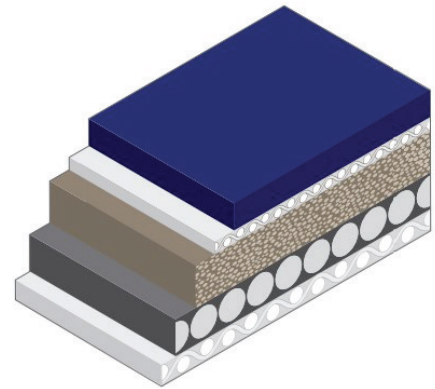

## Guiding Value

### Standard

<b>Color:</b>	Indigo	
<b>Structure:</b>	3 ply	
<b>Surface Roughness Ra*:</b>	1,1 micron	ISO 4287
<b>Compressibility @ 0,17 mm*:</b>	0,8 MPa	PT-300-WI-307 (internal)
<b>Thickness +/-0,02 mm*:</b>	1,95 mm	ISO 12636

\* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



**Continental Printing Solutions Kranj d.o.o.**  
Škofjeloška cesta 6,  
4000 Kranj, Slovenia  
[www.continental-industry.com/printing-technology](http://www.continental-industry.com/printing-technology)

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: [www.continental-industry.com/disc\\_en](http://www.continental-industry.com/disc_en)