

Vulcan X-Coat
Coating

Vulcan X-Coat




Main Application
Coating

Vulcan X-Coat is available in
1,15 - 1,35 - 1,95 mm thickness

Advantages of the product

- › Rubber coating plate suitable for Aqueous/UV varnishing
- › Excellent dimensional stability thanks to the polyester carrier
- › Easy to strip from polyester base
- › Usable in both directions thanks to its fabricless design

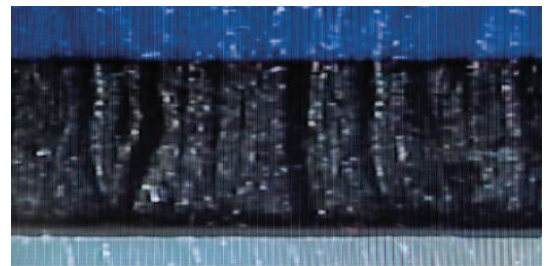

Guiding Value

		Standard
Color:	Red (1,15 - 1,35) Blue (1,95)	
Structure:	Fabricless	
Surface Roughness Ra*:	0,6 micron	IO LAB TEC 060 - E (internal)
Compressibility @ 0,23 mm*:	N/A	IO LAB TEC 060 - B (internal)
Thickness +/-0,02 mm*:	1,15 - 1,35 - 1,95 mm	IO LAB TEC 060 - C (internal)
Cutting depth*:	0,8 - 1,0 - 1,6 mm	IO LAB TEC 060 - C (internal)

* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



Continental Coated Systems Italy S.p.A
Strada Provinciale 140,
26855 Lodi Vecchio, Italy
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: www.continental-industry.com/disc_en