

**Printec 864**

Commercial Sheetfed

# Printec 864




**Main Application**  
Commercial Sheetfed

**Printec 864 is available in 3ply, 1,98 mm thickness**

**Advantages of the product**

- › Conventional inks compatibility
- › Resistance to frequent format changes
- › Provides quick release

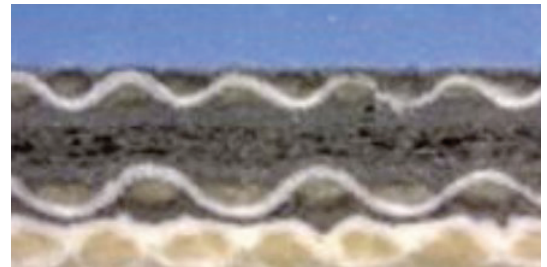

**Guiding Value**

|                                    |            | Standard   |
|------------------------------------|------------|--|
| <b>Color:</b>                      | Blue       |  |
| <b>Structure:</b>                  | 3 ply      |  |
| <b>Surface Roughness Ra*:</b>      | 1,0 micron | TCSBR-QMS-FOP0105:03 / TCSBR-QMS-FOP0005:07 (internal) |
| <b>Compressibility @ 0,20 mm*:</b> | 1,6 MPa    | TCSBR-QMS-FOP0104:03 (internal)                        |
| <b>Thickness +/-0,02 mm*:</b>      | 1,98 mm    | ISO 12636  |

\* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.

 **Continental Indústria e Comercio Brasil Ltda.**  
Via de acesso João de Goes, No. 1.515,  
Barueri, Brazil  
[www.continental-industry.com/printing-technology](http://www.continental-industry.com/printing-technology)

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: [www.continental-industry.com/disc\\_en](http://www.continental-industry.com/disc_en)